Source from Original Manufacturers

Issue No.3

More than 185 products collected in this special booklet. Check the latest from original manufacturers and plan your visiting trip to Secutech 2012 soon!

HD Camera

HI SHARP ELECTRONICS CO., LTD. *on P. 7*

IP Camera

HIKVISION DIGITAL TECHNOLOGY CO.,LTD. *on P. 7*

Image Processer



NEXTCHIP CO., LTD. *on P. 3*

Access Control

TAIWAN JANTEK ELECTRONICS, LTD. *on P. 28*

Alarm

UTECHZONE CO., LTD. *on P. 29*

Transmission



WFE TECHNOLOGY CORP. *on P. 31*

Mobile Camera

MINTRON ENTERPRISE CO., LTD. *on P. 37*

Display

AUSPICE STAR CO., LTD. *on P. 31*

HD Components

AVS7201, Fisheye Lens Distortion Compensation with Digital PTZ

AVS7201 is a mega-pixel image processor that enables electronic pan, tilt, and zoom for surveillance, teleconference, security, and other similar camera systems equipped with fisheye lenses. It converts hemispherical image to rectilinear image and supports multi-view display of selected image areas with independent ePTZ. In addition, this product supports CMOS and CCD sensor inputs and is capable of generating up to four CVBS or digital outputs.

AVISONIC / M914-M917

DIVIS VRC6404HD + VRC6404HD (HD-SDI 8CH)



Chance-I releases new HD-SDI capture board, VRC6404HD, to support HD-SDI cameras and provide the best HD digital images. VRC6404HD adapts hardware H.264 Codec and is able to display real time and record images at CIF / Half D1 / D1 / HD (720p/1080p) resolutions. The VRC6404HD also supports HDMI TV-OUT, integration system with POS and Access Control, and IP cameras. Chance-I provides new mobile applications for iPhone / iPad and Android mobile phone for better connection with DiViS DVR systems.

CHANCE-I / L827, L829

FHD-HDMI Optic Fiber Converter

FHD-HDMI High Definition HDMI optic fiber converter could transmit video of kinds definition under 1080P to the long distance. It adopts all digital transmission mode, the users don't need any adjustment, simple, safe, stable capability could satisfy the high quality needs. And it's widely used in Info Diffusion, traffic guide and information display system, outdoor LED display system etc.

CHANGZHOU HUALONG / L343

PCB, Flex PCB, Rigid Flex PCB, Alumium PCB, Assemby and Component Procurement



ExPlus was established in Taiwan in 1997 which is qualified to ISO9001, ISO14001 and UL (file no.: E210681). Nowadays, we have the production lines of PCB and Assembly services in both Taiwan and China simultaneously which are RoHS compliant to a wide range of companies in the Computer, Industrial, RF products, Automotive, Securities, Telecommunications and other electronics equipment markets. And our core business activities are: Rigid PCB Flexible PCB ; Rigid-Flex PCB ; Aluminum PCB ; PCB assembly job (SMD, DIP, housing) ; Components procurement

EXPLUS / M1112

sxW2

sxW2 is a low latency in-stream pixel processor providing advanced system capabilities such as ePTZ and image enhancements along with de-warp of fisheye lens. The sxW2 also has the capability to seamlessly stitch together multiple cameras. sxW2 enables designers to dewarp lenses of varying field of view, up to 220 degrees, and accomplish dewarp of the entire image with ZERO pixel loss. In addition, users can configure the view up to 16 rectangular sub-views with each sub-view providing electronic pan-tilt-zoom capabilities independently. The open, self-configuring architecture of sxW2 permits designers to use multiple ICs to target systems of higher resolutions.

GEO SEMICONDUCTOR / M1108

TFT with MCU Interface

Simply the user operating of TFT module ; With powerful & various function, which allow users to save more CPU space in CPU and to create more function/ value to the end products. ; Available size: 3.5" / 4.3" / 5.7" / 7.0". Characteristic: Resolution: Internal memory 256K SRAM 320x240 1-layer ; Include JPEG Decoder (size up to 1280x1024) ; 2D Graphic Engine ; Supporting lines / cycle / square drawing and cursor function. ; Rotation 0, 90, 180, 270 degree ; Support the following MCU interface: 8/16 bits 8080

GIFAR / M1001

HD Components

Terminal Block

Our research and development is always based on continuous improvement. We will always provide customers with new designs, reasonable prices and efficient services to be met or exceed their most exacting demands.

GIGAWAY / M1003

Embedded Intelligent Video System –LIVE Series

LIVE series is a high cost-efficiency IVA software running on ARM and DSP. With comprehensive functions and site-proven performance, LIVE is the best choice for device manufacturers to developing mass-selling IVS product.

HYVIEW / M906-M909

SBC1400 (ARM1176 700MHz Processor Single Board Computer)



With ARM1176JZF @ 700MHz processor Single Board Computer. Display Output available for TTL, LVDS and HDMI. Support multimedia applications in 1080p video decoding. Display size available from 7" to 18.5". Support Android 2.3 / Win CE 6.0 / Linux 2.6, and have rich I/O connectors. Our Fanless SBC1400 has a variety of application. It could work with Kiosk, Digital signage, Factory Automation, Medical equipment, Security system, Gaming device, Hand-held gadget …etc.

IC NEXUS / L334

Highend CCD Image Signal Processor (NVP2180)



NVP2180 is a highend and high performance image signal processor to upgrade your CCTV Camera. With αWDR and F-DNR (defog), you will have a distinctive image in any severe circumstances: counterlight, fog, rain, etc. Improved than conventional WDR, αWDR will make you look into the bright scene as well the dark scene at the same time. This enhanced image can be also improved by using D-WDR and 3D-NR together. In addition, new special features include DIS, PiP, polygon privacy mask zone, which will enhance your overall system performance.

NEXTCHIP / M206-M209

XKHAN (PX2089)



PIXELPLUS WDR IMAGE SENSOR (Single Chip SoC Technology): On Dec. 2011 Pixelplus announced its new WDR Xkhan sensor. We have aimed to automotive applications. Its part name is PX2089. The optical format is 1/3-inch. Pixel size is 6.35um x 7.4um, and DR is 120dB.

PIXELPLUS / M900, M902

RN6364

Feature of Video Decoder: 1. Flexible 4 channel analog video decoder with built-in anti-alias filter 2. ADC sampling rate up to 54 MHz for best color and image transient response 3. 2D 5-line comb filter provides the high quality video decoding of composite video signal for artifact-free Y/C separation 4.True 10-bit processing for color space conversion, brightness/contrast/saturation/hue control, and color correction for best performance 5. Support standard ITU-R BT.656/BT1302 format and two/four channel D1 pixel interleaved format output 6. User selectable 0/6.75/13.5/27/54/108 and 9/18/36/72/144 MHz clock outputs with phase and delay adjustments

RICHNEX / M914-M917

Stretch S7 Camera Reference Designs

Stretch S7000 series camera reference design kits feature Stretch software configurable processors and are available in a selection of resolution and output options. The designs feature state-of-the-art technology and are available with either IP or HDcctv outputs and in resolutions ranging from 1080p30 up to 1080p60. IP camera reference designs include the Stretch Intelligent Encoder and the highly efficient H.264 High Profile CODEC and provide the industry's best image quality and lowest compressed bit rates. Stretch IPCAM7100 and IPCAM7120 reference designs can also perform video compression using the Stretch H.264 SVC, providing ultimate scalability and stream management capabilities.

STRETCH / M800, M802

HD Components

RF Connector

BNC Connectors are miniature, light-weight, waterproof interconnecting devices characterized their two-stud, quick disconnect bayonet lock coupling arrangement. They are suitable for a wide range of systems, including Radio Telecommunication Systems, Medical Equipment, Computer, Network, and Test Instrumentation, CCTV Instrumentation.

SUPER PILOT / L1125

M23FD3520 (For ITS)

Big image size of 1/2", 1/1.8", 2/3" and 1" ; High resolution up to 5 Mega-pixel ; Focal length from 6mm, 8mm, 12mm, 16mm, 25mm, 35mm, 50mm and 75mm ; Manual Iris / DC Auto Iris options

XIAMEN LEADING OPTICS / K1012-K1013

HD Camera

1080p IP IR High Speed Dome Camera

Resolution: 2 Mega Pixels (1080p); IR distance: 100m; LED: ¢20=12, 6 for short distance, the other 6 for long distance; Preset speed: 360°/S; Preset points: 128; Lens: Sony FCB-CH6300, 20X optical 12X digital zoom; Network protocol: TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP

ACTIONTOP/ N102-N105

Ai-IR68

"Akula" in Russian means "shark", one of the most highly sensitive fish in its species. As inspired by the shape of sharks, the latest series of Acumen IR cameras, called "Acula-men". It has the highest resolution of 700 TVL with wide dynamic range function. In using the Acumen security cameras, the audio and video signals are perfectly synchronized in a single system. These security cameras have been designed with a wide range of extra analytical functions, such as face recognition, motion detection, motion + face detection, 4 alarm outputs, alarm detection with 2X zoom in, plus a programmable schedule.

ACUMEN / M616-M624

Afreey Wireless 2M Full HD H.264 Pan/Tilt IR IP Camera

The Afreey ANC-818M features a 2M Full HD CMOS sensor. Multi-Codec (H.264/MPEG4/MJPEG) and multi-streaming; Support 802.11 b/g/n; Support e-PTZ function; Up to 30 fps at 1920x1080; Build-in microphone, SD Card slot, USB hard disc slot; Support easy wireless setup-WPS key; 12 IR led for day & night monitoring; Support connectivity with smartphone, iPhone and pocket-PC; Pan:355 degree; Tilt:135 degree; Support ONVIF standard.

AFREEY / K935, K937

2-MegaPixel Pan-Tilt Outdoor Vandal PoE IPCAM

OD-2060HD is a 2.0 Mega-pixel Vandal proof IP66 PTZ (Digital Zoom) outdoor IP camera with H.264 video streaming, Power over Ethernet, and ONVIF standards. The video quality is 1080P @ 30fps which means smoother and more detailed images. OD-2060HD is best suited for surveillance where the camera needs to cover a larger area such as shopping mall, hotel, parking lots, warehouses, loading bays, seaports and airports.

AIRLIVE / K300-K303

HD Camera

Alinking 2-megapixel H.264 IP Camera

Alinking HD 2-megapixel IP camera adopts high quality CMOS sensor to reproduce ultra smooth video images of still objects, even moving objects. With high-definition resolution, Alinking 2-magapixel ip cameras can deliver extremely clear and sharp images. Two-way audio, video motion detection, active tampering alarm, PoE (optional) and a SD/SDHC slot for optional local storage are also supported. From design to mass production, each process is controlled strictly by Alinking's self-own factory in Taiwan to ensure the product quality. Alinking high-end 2-megapixel ip camera (network camera) is an ideal solution for airport, freeway, building entrance, bank, store, school, open space or accurate identification applications.

ALINKING / K328-K331

AOP Full HD Video Camera Module

A-Optronics shows a customization capacity for integration of optic, mechanic, hardware and software design. We have developed several video image processing algorithm based on our ISP, including 3A, CAF, BT-IRIS, etc. Also we have developed lens for HD video image (1080P), like 2.5X, 3X, 12X optic lenses. And now we have a completed solution for HD video image used for security/ surveillance which including laser light module, HD camera module, HD-SDI recorder.

A-OPTRONICS / L1120

D4SO Series

Arecont Vision Announces New D4SO Outdoor All-in-One Dome Camera Solutions. Arecont Vision, the industry leader in IP-based megapixel camera technology, announces new D4SO all-in-one megapixel dome cameras. These 1.3MP, 1080p, 3MP, and 5MP outdoor dome solutions feature an IP66-rated enclosure and are available in both Color and Day/ Night models with either surface mount or in-ceiling configurations. The D4SO series delivers the highest quality megapixel imaging at very competitive price points for price sensitive applications.

ARECONT VISION / J424, J426

AVer SF2012H series 2-megapixel IP cameras

Featuring a range of camera types, like cube, box, bullet, and dome, the AVer SF2012H 2-megapixel IP camera series adopts the latest H.264 compression technology and delivers HD720p resolution with real-time recording and display up to 30fps. When fully integrated with AVer DVRs/NVRs, the SF2012H IP camera series gives users preview performance up to three times faster than that of other IP camera brands through the exclusive intelligent streaming feature. Coupling AVer's IP cameras with its DVRs/NVRs also helps users to achieve unlimited surveillance management through CMS and remote access through mobile devices such as iPhones, iPads, and Android phones.

AVER INFORMATION / K324-K327

AVIR-HD41VAH

AVICO take the world by surprise. LOOK AT THINGS BRIGHTLY!! 2.2M IR Bullet Mega Pixel Camera; AVIR-HD41VAH newly designed by AVICO. * 1/3" Panasonic CMOS sensor; 2,227,080pixels (Total) / 2,122,848 pixels (Active); Resolution: Max. 1,100 TV Lines; Progressive Scanning System; BT 1120 digital Output; Day & Night (ICR); Wide Dynamic Range; Multi protocol support; Intelligent motion detection; Intelligent object detection; External Control : Focus/Zoom(Gear type), OSD; Control (Joystick); Built-in IR LED 40pcs; (Night View Distance : Indoor 60m / Outdoor 50m); Built-in Concealed Cable Bracket

AVICO / L340-L341

ICS8624

Bullet Camera with IR Illuminator; 3Megapixel/H.264/PoE. 3-Megapixel CMOS Sensor; 4 IR LED ,Range up to 15~20M; Real-time H.264,MPEG-4,and MJPEG Compression (Triple Codec); Support 3GPP; Built-in SD/SDHC Card Slot for On-Board Storage; Built-in 802.3af Compliant PoE (ICS8624); Support IP66; Support Digital Zoom (1-10x)

BIG GOOD HOLDINGS / M321-M329

HD Camera

Brainchild CAM53X Series Mini Dome Network Camera

The Brainchild CAM53X series, with compact and portable design, can be installed on the ceiling to cover wide field of monitored scene. The CAM53X series equipped with high quality sensor not only delivers clear image captures, but also remains stability to monitor every corner. Coupled with user-friendly interface and smart video management system, CAM53X series is the best surveillance guard protecting physical and environment safety.

BRAINCHILD / K1123-K1124

5 Megapixel Cube Network Camera (CB-500A Series)

HDTV grade superior video quality. The Brickcom CB-500A Series provides full frame rate video in resolutions up to 5 megapixel including HDTV (Full HD 1080p @ 30 fps streaming). At the same time, the CB-500A Series supports H.264, Motion JPEG and MPEG-4 for multiple streaming to meet different quality need. The CB-500A Series use a 1/2.5" Sensor, offers a reliable video even in a low lux application (0.5 Lux @ F1.5/ 0.8Lux @ F1.8). Brickcom understands the importance of the video quality, and develop this CB-500A Series providing clear, sharper video and color fidelity.

BRICKCOM / K108-K121

LR-399A Series

Double automatic focusing high speed dome camera; 6 inch housing, weatherproof IP66; OSD menu, support multi language; General III IR infrared (one infrared chip), high power but low consumption; IR night vision 120m, can see fingers; Aluminum structure, strong, high heat dissipate efficiency; Motion detection and alarm (optional); 3D positioning (click to enlarge), can support screen coordinates and local enlarge by software; Built-in Surge and lightning protection device, effectively prevent 6000V transient current; High speed, Horizontal: 360°, 0-120°/S, Tilting: 90°, 0-40°/S; 6 scanning track, 128 preset positions, RS-485 control; Built-in decoder, open agreement, Input voltage: 12V DC; No fish eyes effect, Net weight 6.5KGS

CHINA LONRUN / M542

COMPRO CS400 Outdoor-Ready Bullet Network Camera

CS400 provide an out-of-the-box IP video surveillance solution for professionals and novice users. These outdoor-ready network cameras can be easily and quickly installed without the need for router configuration or networking expertise. The plug-n-play nature of CS400 goes with IP66-rating and extreme low-light performance, ultra-clear night-time image quality is achieved on Compro CS400 with 30 high-performance IR IEDs, a mechanical IR-cut filter, and a double-glass construction. CS400 is loaded with leading-edge H.264 video compression technology and smart motion detection, offer a feature-rich smartphone app that lets users securely view and manage multiple cameras over the Internet.

COMPRO / K306-K313

DSC-737SE

It contains Sony 960H double scan CCD that provides crystal-clear view and perfect wide dynamic range (WDR). This speed dome has the best-features currently available in the world. It also allows users to adjust the color level. Many other great features such as Auto Bad Pixel Correction, Best True WDR (ACE, Low, Mid, High), rapid focus speed, IR collection (that helps get good focus when using IR illuminator).

D-MAX / N802, N804

SDI HD CCTV Box Color Camera

1/3" 2.0Mega Pixel CMOS Sensor; Support 1920x1080@30fps / 1280x720@ 60fps High Definition output; HD-SDI via BNC connector; Built-in ACCE (D-WDR) Function; Programmable AE/AWB/AF detection; Built-in Day/Night automatic ICR filter; OSD Function Control; Digital 3D Noise Reduction; Motion Detection; Privacy Mask (8 position, Color Select/ Mosaic)

EYEVIEW / N502-N503

HD Camera

PT- Series

FLIR offers Infrared Security camera that see in total darkness. This is a unique function compares to the conventional CCTV or Low light camera, thanks to the thermal detection principle. FLIR supports wide variety of security projects in commercial, such as Airports/ Ports, Maritime, Solar Cell/ Quarrying field surveillance, high importance events etc that requires all-round solutions of surveillance cameras work in network and control room. New launch 640x480 high resolution thermal imaging cameras, available in different models for different application needs.

FLIR / J217, J219

FULL HD 1080P HD-SDI High Definition High Speed Dome Camera

Our model FST-SD20L5 camera combines full HD images at up to1080/30p with a 20x optical zoom lens capability, providing a powerful solution ideally suited for integration into surveillance-based, conferencing and broadcast applications. Featuring full 1920 x 1080 HD resolution, with Sony™ FCB-EH6300 camera module built-in incorporates a 1/2.8-type HD "Exmor™ CMOS sensor" with 3.27 Megapixels, providing high image quality and high sensitivity, capable of achieving an outstanding minimum illumination of 0.5lx (F1.6, 50IRE) in colour when operating in High Sensitivity mode. Day/ Night & Wide-D Functions. Weatherproof IP66 with heater and fan.

FORESIGHT / L546-L547

True FULL HD (1080P) Surveillance System

High quality image capture makes your life safer. GKB launches true full HD-SDI camera with 2Megapixel CMOS sensor. Detail image gradually becomes necessary for your surveillance system. You don't have to worry about image deterioration and bear low picture quality anymore. GKB HD SDI camera makes your dream come true. As a professional HD Surveillance system provider, GKB start with the HD Hybrid DVR, 2channels HD plus 14 channels SD input; besides the 2 channels HD, it could be work as a 14ch Full D1 DVR and it would be more acceptable within the current market. GKB True FULL HD Surveillance System assists you to construct a safe environment.

GKB / L616-L624

HD-H138VTL

1/3" Sony Super HAD CCD II; HD PRO DSP Smart-I; 620TVL Excellence Performance; D-WDR (Wide Dynamic Range); True Day and Night with ICR; 3-Axis; 0.000001Lux (IR LED On)

HDPRO / M625-M633

HS-HDC004

3.0 Megapixel HD CCTV (SDI) Color Camera; 1920x1080P@60fps; Color: 0.2Lux@F1.2, B/W: 0.01Lux@F1.2; Video Output: SDI(BNC), HDMI; WDR ; DNR ; AGC ; Flickerless; External IR equipment optional (HS-EIR001); OSD Control by button / remote control / RS485 Control; IR cut day and night switch; Built-in microphone and audio output; DC12V/AC24V.

HI SHARP / M224-M235

DS-2CD7264FWD-EIHZ 720P WDR Vandal-Proof Network Dome Camera

The DS-2CD7264FWD-EIHZ is specifically designed for outdoor monitoring with weather proof and vandal resistant. The product delivers exquisite images with resolution of 720P. Featuring ultra low illumination of 0.01Lux @F1.2 with AGC on and 0 Lux with IR, this camera can realize monitoring within 30 meters 24/7. The 120dB wide dynamic range allows the camera to handle extreme contrast of brightness within the same scene. Moreover, this camera adopts motorized zoom lens which enables faster focusing and configuration of focal length parameters via client software. By utilizing heater, the camera can well perform in extreme cold conditions.

HIKVISION / M312-M320

HD Camera

CCTV Camera

HUB new product line-up include the newly developed camera case, with advanced Extreme board, it delivers super high resolution of 650TVL Color and 700TVL B/W, and has functions such as 3D-DNR, WDR, DSS, SMART IR, etc. Now our sleek design, user-friendly, and state-of-the-art products are well sold all around the world and gained ground against other established names.

HUB / L232

iMege M2210E/ M2210V

iMege M2210 is a Full HD, compact IP camera specially designed for buses, trains, and other vehicles applications. The camera comes with 3-axis mechanism design that allows users to adjust the camera's viewing angle for increased installation flexibility. Capable of rugged RJ-45(M2210E)/ M12 (M2210V) ethernet connector & IP67-rated housing can against shock, vibration, humidity and dust. The M2210 is also embedded with 802.3af compliant PoE, ePTZ and all-in-one mechanism for easy installation.

INGRASYS / K422-K427

Fine Eye (HDcctv Camera) & Link Eye (HD IP Camera) Series

KT&C Fine Eye Series provides a high definition digital image performance using maximum 2.1 Megapixel CMOS. It is good enough to grab real-time HD video at 60fps and provides clean and clear images. Fine Eye Series deliver digital high-definition video by using HD-SDI (BNC) over coaxial cable; it offers successfully greater cost effectiveness and easy-to-use for surveillance. KT&C Link Eye Series is a dual-stream HD Network camera with a maximum resolution of 1920x1080 at 30fgs. It supports H.264, MJPEG, which can be provided simultaneously either in full frame rate or individually optimized for different quality needs and bandwidth constraints.

KT&C / M522-M527

MDC-H6290VTD-45

MDC-H6290VTD-45 is professional and powerful Weatherproof IR HDcctv Camera. It has powerful features such as filter changeable 6-50mm MP Varifocal Lens for wide focal length adjustment / SMART IR for avoiding saturation due to excessive IR reflection / Built in Joystick for OSD Menu control / Second video via composite output for easy installation and lens adjustment (Doesn't need HD-SDI signal converter or HD-SDI Digital Video Recorder) / External Focus & Focal Length Adjustment. If you're looking for powerful IR HDcctv Camera for outdoor use, MDC-H6290VTD-45 will be the best choice ever.

MICRO DIGITAL / K643-K648

Uncompressed High Definition Camera 720p/1080p with the SMPTE standards

Mintron released the latest high-speed with Serial Digital Interface (SDI) transmission technology which is compliance with the SMPTE 274M and 296M standard. The broadcasting level camera features real-time videos, 800TVL high resolution, and low-light image under 0.1 Lux. The customer gain application range of nighttime surveillance and low-light inspection. The difference from IP-Cam is SDI, non-compressed transmission technology, allows video, audio and control perfectly, the video transmission can CVBS and HD-SDI or HDMI (High Definition Multi-Media Interface) or FIBER (Selectable By Order) output simultaneously. Mintron's SDI can be applied to many types as high-end home security, intelligent biological reorganization, mechanical inspection, medical surgery, and other HD applications.

MINTRON / L704-L707

HD Camera

Round Mirror Camera

The surface of Mirror Camera is coated with a special technology of Nimax's own patent, which can make the built-in camera not be seen through by human eyes, while the camera can still view behind the mirror. Furthermore, there is NO PINHOLE on the mirror surface! Also, the cable lines are all covered into the bracket. So it's difficult to distinguish Mirror Camera from a normal mirror and thieves will never think of destroying it when they are about to do some illegal things. Besides, with 1/3"" Sony Super HAD CCD Sensor, Mirror Camera can produces high quality image at resolution 420/540 TVL.

NIMAX / L1124-L1126

PNC-iX12 / PNC-iD12

Pinetron, the leading DVR specialist in Korea releases new smart IP Camera in 2012. It supports Maximum 25fps (30fps at NTSC) Recording at all resolution. 2.0 Megapixel gives you high quality image with true colors and real time recording provides with smooth playback footage. In addition, it has installer-friendly features such as GUI based IP setup through BNC out and 16-IP Camera Recording Setup Summary at CMS which are similar like analogue camera setup on DVR. You can also connect it with various application including i-Phone and Android APP.

PINETRON / M637-M642

PIN-H2010TIR

2M Full HD-IP Fixed Outdoor WDR Small IR Dome Camera (PIN-H2010TIR): PROBE's 2M fixed IR dome camera is a product of high performance supporting 1080p. Even though the size of the camera is small, the performance of WDR, TDN, DNR, DSS, and BLC is very outstanding and you can easily find out that its images are very clear when compared with other products in its category. It supports CBR/VBR streaming, H.264/MPEG4/MJPEG codec, maximum frame rate of 30 fps, and 28 Privacy Zones.

PROBE / M106-M109

QH-IP11-MP

Resolution up to 1920*1080, real-time image,(1280*720,real-time option); 1/3 Progressive Scan (WDR) CMOS ,captures motion images without jagged; 2.8-12mm DC ICR Lens, Support Color/BW mode converting ,IR-CUT; 42 IR LED lights, IR working distance: 30m; Support H.264/MJPEG video encoding, dual-stream, high compression ratio, high video quality; Embedded Web Server, support IE browser, user rights management, ONVIF protocol support

QIHAN / L810-L811

Megapixel Solution HD-SDI & IP, TDN, IP68 Rating Camera

Ronix, Frontier Technology company, released advanced Mega Pixel solution. M1.3/M2.0 based IP and HD-SDI output are ready for your decision. Highly detailed pictures can be achieved and color reproducibility deserves attention. In the case of Mega HD-SDI camera, RS-485 remote control is available and provides Max. 140M transmission distance through RG-59. Mega IP camera is compatible with Onvif and PSIA. Outputs H.264 / MJPEG dual streaming and POE, Local AC24V / DC12V are supported. SD memory card slot and Cooling Fan are worthy of notice. Patented FOCUS setting Aid, supporting NEEDLE FOCUS, and TDN by Dual Filter serves error free focus adjustment between day and night.

RONIX / N902, N904

Outdoor Mini IR High Speed Dome Camera

BT-62F as outdoor model of our Mini IR speed dome series, it support 50 meters IR distance and functions like PWM LED tech, Ambient light detection function, Total metal construction, which ensure perfect heat sink performance, day& night performance and IP66; in addition, it support multiple languages, IP module, Alarm, Auto tracking, Video analysis etc. Should you have any inquiry please feel free to contact us.

SHENZHEN BESTECH / L344-L345

HD Camera

CCTV System

As an experienced device supplier, we go to great lengths to ensure the quality of our Megapixel HD-SDI cameras, speed dome and DVRs. D-vitec product range covers 14 series, more than 100 items including the latest HD-SDI, 650TVLine Effio E, 680TVL WDR. Our latest products have higher resolutions and greater light sensitivities than ever before.

SHENZHEN D-VITEC / L240

IP Camera

When you are not at home or in the business travel, do you miss your family or want to know what the situation of the company is? If you install one IP camera at your home or office, you can view the real-time video shot of your home or your office wherever you can connect to the internet via a computer or a mobile phone, so you can keep eyes on your loved ones and your business at anytime from anywhere.

SHENZHEN EASYN / M100-M101

Infrared Series High Speed Dome

Mult-Language operation menu, Ease installation, IR distance: 100~150M, Monocrystal Infrared LED instead of LED Array, LED Power Dissipation:3.5W, Wave:850nm, 128 preset positions, Level:360°rotation, Vertical: 90°auto flip, Horizontal/ Vertical scanning speed: 100°/sec, Three pattern scan path, Six group programmable scanning track, RS-485 protocol compatible

SHENZHEN FENGTAIDA / N810-N813

HD-SDI IR Bullet Camera

1/3" Panasonic CMOS, 1080p/30fps, 720p/60fps; HD-SDI Video Output; Vari-focal Lens; 280pcs IR LED, 75-80M IR range; Smart IR/WDR/BLC/HLC; External Lens/Zoom Adjustment; Built-in Service Video Out & Correct Power Indicator; Cable Managed Bracket; RS-485/ AC24V.DC12V; IP66

SHENZHEN IVT / L136-L137

TE-IP811A

TE-IP811A features a Dual-core 32 bit DSP and 1/2.5 inch Micron 5 megapixels progressive CMOS. With H.264, 1080P+CIF dual streams, Frame rate is 1-30fps, it provides clear and detailed image of each frame. Support IR cut function, USB storage and BNC output, With 2 Array Led ,IR distance up to 100m.It supports multiple networking protocols FTP/ PPPOE/ DHCP/ DDNS/ NTP/ UPnP .,etc. Embedded processor provides various functions such as motion detection & alarm, storage linkage, OSD, UC remote monitoring software and etc. It is suitable for varies of housing in IP video surveillance as its special design and excellent performance.

SHENZHEN TUNGSON AGES / N1014-N1015

VT-DK7204HB

Big gift of wholesafe for your family; 7" LCD Unique football case DVR; 2-CH outdoor professional waterproof IR cameras; 1-CH indoor professional dome IR camera; 1-CH doorphone; Central power supply; Profession A/V cable with aviation connector (not easily be loose)

SHENZHEN VITORIA VIDEO / L342

HD Camera

BL-5720HSD - 0.01Lux Megapixel HD High Speed Dome Camera

BL-5720HSD megapixel high speed dome camera, which adopts progressive scan technology, supports 1280x720/432x240 resolutions without compromising the image clarity. It has 4 patrols and 128 preset points for each patrol. There are a variety of exposure modes so that you can select an appropriate one as per different lighting condition. The camera can automatically brighten the video image in partial light and possesses video playback brightening technology to let recorded dark video image become visible or clearer. What is more, it enables you to view the fast moving objects clearly with electronic shutter function. And frame rates can be controlled to reduce storage consumption.

SHENZHEN WAVE-PARTICLE / K1014-K1017

150M Intelligent Vari Focal IR Infrared High Speed Dome Camera

Worldwide innovation for the first outdoors speed dome ever made.360° continue rotation comply with IP66.32 bit ARM CPU processor allows advanced software technology provide significant features and low power consumption. IR illuminator includes vary focal lens with unique high performance LED. Camera zoom lens is auto synchronized with the IR illuminator motorized lens. Makes this simple to use and avoids normal IR LED problems. Long light illumination range enables clearly Identification of people at 150 meters in full darkness. 5-10 times longer life than traditional LED. Unit ID settings can be configured via software and or hardware. Factory default settings include adjustment of perfect combination for viewing angles of camera zoom lens with IR vary focal motorized lens.

SHENZHEN YOUGUAN CCTV / M432-M435

SCL-168 Premium Resolution IR All In One Camera

The SCL-168 is a 650TVL 48-IR Camera. True 650TV lines premium resolution images by W6 DSP in all lighting conditions. DNR-3 (2D+3D) & true D/N with Sense-UP (X512) performance. Smart-IR controls correct image from strong IR LED. 2.8-11mm, 6-50mm ICR Lenses are available. Easy installation through detachable bracket & easy adjust OSD & Lens from under cap of body. Radiant distance up to 45M & 15 language support & heater. Useful option of DC12V/ AC24V Dual power. Strong aluminum housing for outdoor with color of ivory or dark gray. PIR Sensor available (SCL-168PIR) with 12 white LED & 36 IR LED.

SICAM / N1126

700TVL SONY Effio-E HD Camera (UQ-W2003)

SONY Effio-E solution, 700TVL with high-definition; 4-9mm/2.8-12mm Munual Zoom lens; AGC, AWB; High color reproduction; ATR(Adaptive Tone Reproduction); Powerful digital 2D noise function; Backlight compensation, highlighted compensation, WDR; Highlight inhibition, benefit for night car plate monitoring; S/N Ratio: ≥52Db; Motion detection; Privacy function; Minimum Illumination: 0.06Lux in Color mode; Day/ Night: Auto Color turn to black and white; Adopt new infrared technology, IR Distance 40-50meter; OSD Menu control, user friendly

SINOVISION / L134

ANPR Camera (Automatic Number Plate Recognition) Camera; (Model code: SJC400B73NAIF (for NTSC), SJC400B73PAIF (for PAL)

SJ's latest released ANPR Cameras (SJC400B73 series) is designed to delivery successful ANPR capture via consistent monochrome images under all lighting conditions. In addition, by taking advantage of the retro-reflective characteristics of number plates, the illumination from the illuminator will be reflected directly back to the camera and only infrared light will be seen without any visible light or other reflections or refractions. Its main features: Delivers consistent monochrome images under all lighting conditions; Cover areas: 3 ~ 18.2m (10 to 60 feet); 6 ~ 50mm Vari-focal lens built-in and adjustable externally; 36 x IR LEDs; Concealed outdoor bracket with 3-Axis arm

SJ MICROTECH / M304-M305

HD Camera

Outdoor H.264 True Day/ Night IP Camera

The SIU7110 offers the latest IP network and compression technology, featuring a CMOS image and powerful real-time image processing hardware that delivers full frame rate video at 1080p resolution. This IP camera features latest H.264 compression to optimize image quality, and lower network bandwidth and storage capacity requirements. This 5M Pixel CMOS IP camera features high resolution video output, 12V DC, PoE and the ability to multi-stream H.264 video and MPEG4/MJPEG video images up to 30fps.

SMAX / K514-K521

SOEST STO-82 Waterproof IR Bullet Camera

SOEST STO-82 Waterproof IR Bullet Camera is truly day & night with the excellent imaging performance. Its external IR LED Array illuminators ensure enough brightness for surveillance and avoid the flashlight effect compared with the regular IR LED. It's equipped with the three-axis gimbal, video output for CCTV multi-tester, easy focusing mechanism and external OSD setup/function keys, which proves that the installation is easy and operation is convenient. Furthermore, STO-82 is a totally customized product based on your choosing of the lens, CCD, power of IR illuminators, etc.

SOEST / N022

IC737 Wi-Fi/3G Megapixel IP Camera

The StarVedia IC737w mega-pixel network camera is a high performance network camera with state-of-the-art H.264 video compression; designed with the "user-friendly" idea deep in mind. The advanced features comprehend built-in body sensor (PIR), WPS also enabled (Wi-Fi router) for easy wireless network setup, and it is endowed with Wi-Fi strength auto-detection. In addition, StarVedia accommodates with "mCamView" 3G accessible IP solution, to support iPhone/ iPad, Android and affiliated smart phones. On iPhone, equipped with real-time push notification, as on iPad, mCamView HD and the application of multi-channel viewing mode complement each other. USB for 3G dongle is also accessible and thermometer as built-in additional functions.

STARVEDIA / K524-K527

TBAR51-30

Advanced DSP for excellent picture quality; 420 TVL high horizontal resolution but amazing price; IR distance up to 30m/ 98ft

TAIWAN VIDEO SYSTEM / M140-M143

3 Megapixel Fixed Box IP Camera

The Triclouds B0302 Series offers a reliable and excellent solution for 24-hour video surveillance. The B0302 Series offers highly efficient H.264, MPEG-4 and MJPEG video compression. With the megapixel progressive sensor and removable IR-Cut Filter for Day and Night Function. Also it has simultaneous dual stream for optimized quality and bandwidth. The B0302 Series offers 1 DI/DO for external alarm and sensor device, built-in SD/SDHC memory card slot. The B0302 Series also support 802.3af PoE, USB Connector and TV Out function.

TRICLOUDS / K023

AU-G57 Series High-speed Integrated PTZ Camera

AU-G57 series high-speed integrated PTZ camera, According to the outdoor surveillance requirements integration without exposed line integrated design, with 360°endless with shields, lens and a preset decoder, power supply, wiper, fan, heater together; high speed , housing for integral aluminum die-casting molding, completely solve the long time running outdoor dustproof, waterproof problem, ensure the image quality. Can be equipped with a variety of LED Lamps (Infrared-850nm / 940nm or white), large lens and box camera by a user option, it is the good ideal choice for outdoor remote monitoring.

VIDO / M204-M205

HD Camera

FE8172/72V 5-Megapixel Fisheye Network Camera

VIVOTEK FE8172 (indoor) and FE8172V (outdoor, EN50155/IK10/IP66) fisheye network cameras, featuring detailed 5MP-resolution sensor with superb image quality, offer 180° panoramic view (wall mount) or 360° surround view (ceiling/floor/table mount) without blind spots. It is extremely suitable for monitoring wide areas such as airports, shopping malls, parking lots, retail stores, offices, and much more. The removable IR-cut filter allows the camera to offer clear images 24 hours a day. The vandal-proof IK10-rated & weather-proof IP66-rated housing is designed to ensure the FE8172V to operation under harsh outdoor conditions. The FE8172/72V is the top choice for constructing a robust surveillance.

VIVOTEK / K122-K135

MS-100/101

HD-SDI Equipment has been mainly used to transfer high-quality, uncompressed video and recently has been gaining interest and popularity in the CCTV System Industry. With the rise in HD-SDI CCTV systems, Wonwoo Eng. has released the 2.2-Megapixel camera series. The Full HD Mega pixel camera series use Panasonic's 2.2 Mega-Sensor resulting in a more vivid picture quality. It also has various functions of WDR, DSS, analog output, and others and can also output to HD-SDI signals. And the board type camera, MM-12 is single 42*42 board design compatible with existing analog cameras and analogue camera systems so it can be used directly with current CCTV systems. This new 2.2 Megapixel camera series are expected to greatly contribute to the new age of Full HD megapixel cameras.

WONWOO / M600-M605

Weatherproof IR Bullet Ultra High Resolution Camera with WDR and DNR

This 1/3" Sony CCD IR camera supports 600TVL color resolution. It is IP66 weatherproof and is equipped with 30 IR LED for 30m IR projection. The high sensitivity Sony Super HAD II CCD ensures sharp images in any environments, even in total darkness. Furthermore, it has built-in advanced functions D-WDR, which counters intense back light, and 2D-NR, which helps achieve a clear picture in low lux conditions. The camera has an elegant and compact design which blends well into its surroundings and can be installed indoors or outdoors.

X-CORE / N724-N727

ZAVIO F1100/F1105 HD 720p Compact IP Camera

ZAVIO F1100/F1105 HD 720p Compact IP Camera, designed with "simple" and "effective" ideas, allows users to quickly build an easy home surveillance system and then access the IP camera anytime, anywhere through the FREE mobile video management app- ZAVIO CamZaview. Compatible with ZAVIO CamZaview mobile app, F1100/F1105 provide users diverse powerful functions you need, including intuitive setup, mobile live viewing and camera management, push notifications through iPad, iPhone and Android mobile devices.

ZAVIO / K843, K845

Model: DH-SD6582-HN. 2Megapixel Full HD Network PTZ Dome Camera

Featuring 1/3" progressive scan Exmor CMOS image sensor and advanced TI DaVinci Series DSP, coupled with 20x optical auto-focus zoom lens, DH-SD6582-HN presents you with superb picture quality with 2.0Mp high resolution at relatively low power consumption. In addition to its high image quality, the wide pan/tilt range (horizontal: 0°~360°; vertical: -2°~90°) delivers broad images of each scene and a complete picture of ongoing events. Moreover, this dome supports 255 presets setup, coupled with PTZ mode (5 pattern, 8 tour and 5 scan) and can go to the preset at the speed of 400°/s horizontally and 180°/s vertically, which reduces the time spent on the movement to the preset to better protect the on-site environment and provide important forensic material.

ZHEJIANG DAHUA / M717-M728

HD Camera

Full HD Camera Module/ Board Camera

Best Choice in Full HD Camera Module 1080 60P/30P. With our first Generation Full HD Camera Module PE1005 (1080 30P 10X). Announced on 2007 spring, the second generation 1080 60P with F/F & 22X zoom follow. Our own 3A and advance optical Image technology will satisfy your product and customer's need. 1080 30P/60P + Optical Fiber Transmission is our new solution in FULL HD Image transmission field. Welcome to our booth.

ZHONGZIVILLE / N012-N013

Lens

Projection Lens, Telescopic Lens, Dynamic Aperture, Optical Lens, Metal Parts Manufacture and Surface Treatment, Telecentric Lens

1. Provide more efficient production of services such as optical design, mechanical design, the production of metal parts and surface treatments (super hard anodizing). Also includes performance test device. 2. Be the only one MP manufacturer in Taiwan, including eyepiece and object lens with highly accurate and coating performance. 3. Customized product, offer more professional and flexible services. 4. Have been accumulated more than 30 years experience in this field, satisfactory quality is always our pleasure. 5. With excellent capability and experience can meet the high accuracy request. 6. Both of deep view depth and extra low distortion advantages adopt to the application of visual and automatic design.

BASO PRECISION OPTICS / M903

VIR35160-3MASDN

It's time to welcome new technology from DAIWON OPTICAL CO., LTD. We launch new lens, VIR35160-3MASDN covering 3.5-16.0mm. Since it supports 3 megapixel performing full HD, you can get more vivid image and verify any aspect ratio can be used without losing resolution. IR correction maintains resolution from visible light to near infrared light without image degradation and embedded ICR filter helps to protect your property during Day and Night. To experience new world, contact us today.

DAIWON OPTICAL / N1018, N1020

CCTV Lens

RICOM mainly developing and manufacturing CCTV Lens as following items: Mega Pixel Lens / Mega Pixel & IR Lens / Mega Pixel ICR Lens; Sync-focus Lens; Big Aperture Lens; Day & Night Infrared Lens; Vari-focal Lens; Pinhole Lens; Motorized Zoom Lens; Special Optics Lens; Outdoor Speed PTZ; POD System and etc.

FUJIAN FORECAM OPTICS / K600-K605

1/3"IR Mega-pixel Vari-focal (ICR) Board Lens

Up to 1.3-2 mega-pixel high resolution ; Enables 24 hours surveillance (Minimize focus shift in the near infrared rang) ; Compact design ; for φ14 mount and M12xP0.5

FUZHOU DEVELOPMENT ZONE HONGFA OPTOELECTRONICS / M201

2/3" CCD 5 Mega-Pixel Lens (KJ23F0816M5S)

SolidTek introduces the security industry 5MP Lens. 2/3" Sensor with C/CS mount ; F Number: 1.6, Fixed/ Manual/Auto Iris ; EFL: 8mm, FOV: 77.4°

SOLIDTEK / M801, M803

Lens

M13V_288IR

M13V_288IR is a 3 Megapixel IR corrective CS-mount lens with an aperture of F/1.2. This lens accommodates an imager size of 1/3", and the focal length of 2.8-8 mm provides an angle of view of over 100°. Designed to achieve megapixel resolution in both "day mode" and "night mode", this lens minimizes chromatic aberration in both the visible and infrared spectrums to deliver extremely clear images around the clock.

TAMRON / L628-L633

16X Zoom Lens

T5096-HQ is a 2 megapixel lens with auto iris function and IR-cut filter option. This lens accommodates an image size of 1/3" inch, and focal length of 6~96mm. Designed to achieve megapixel resolution in both "day mode" and "night mode". For more information: www.union-optech.com.

UNION OPTECH / L335

Transmission

ALINK-A300n

ALCON, an experienced manufacturer of 2.4GHz/5GHz Outdoor WiFi System based in Taipei, Taiwan, currently presents its new dual radio solution named ALINK-A300n. This device boasts 2X2 MIMO technology for both 5GHz backhaul and 2.4GHz access point in maximum 300Mbps data rate. It features an IP68-rated enclosure offering stable performance in rough outdoor environment and the large bandwidth for various CCTV applications. To view more ALCON products, please visit the web site: www.alcon.tw.

ALCON / K010-K011

rBOX104

The robust Din-rail fanless embedded system with four PoE ports for intelligent transportation systems, power plant automation, facility monitoring systems, IP video surveillance, APs, and intercoms. It supports extra low power Intel® Atom™ processors Z510PT/Z520PT with extended temperature range of -40 to 70°C for use in extremely hot or cold environments. Multiple built-in COM, LAN and USB 2.0 enable fast and efficient data computation, communication and acquisition. The rBOX104 features SNMP V1/V2c support for network management. To streamline implementation of management applications, Axiomtek has launch "AXView" monitoring software package for customers to build their own management systems easily and quickly.

AXIOMTEK / K138-K143

VDS2700 Series – Transmission Set

A Smart accessory for installer. Have problem with network length limitation and failed in 32 cameras' installation to surveillance system. Here our VDS2700 solves it. Features: Half duplex channel for EIA standards RS-485 interface port; The range of RS-485 Transmission Rate is between DC and 38 Kbits; Great quality at video signal (Real-time analogue video signals, No signal lost, No interference in video, No hum, No twist); Link fault warning buzzer inside (Siren sound)

BIWAVE / N506-N507

HTTPS/SSL Real-Time Forensics and Lawful Interception System

HTTPS/SSL Network Forensics Device (HTTPS/SSL Interceptor) is designed specially for forensics purpose where it is used to decrypt HTTPS/SSL traffic. It can be used by legal enforcement bodies, police, investigation units, forensics firms, government departments for tracking or monitoring suspects HTTP and HTTPS activities (through Internet). HTTPS/SSL Device has E-Detective web reconstruction function (HTTP Link and HTTP Content) integrated into the system which allow the administrator to see the web page content of normal and secured web page.

DECISION GROUP / N1117

Transmission

LINE-PCI-E 32*25

Stability - the core of software "Line", works as a Windows service; Hybrid - support many types of ip cameras, and you can mix analog cameras and ip cameras; High resolution - analog camera support 704*576, IP camera not limited; Remote management - you can remote manage servers anywhere; Different range of reactions - more than 10 types of reactions; Web server - support IE, Chrome, Firefox, not need install ActiveX; Mobile solution - support IPhone, Ipad, Android, Windows mobile and J2ME; Multi-zone motion detector - automatic suppression of video noise. Set sensitivity for each zone; 5 year warranty, free software update.

DEVLINE / N710-N715

Fiber Media Converter

Fiber media converters, also known as fiber transceivers or ethernet media converters support many different data communication protocols including Ethernet, Fast Ethernet, Gigabit Ethernet, T1/E1/J1, twisted pair, multi-mode and single-mode fiber optics. They are simple networking devices that make it possible to connect two dissimilar media types such as twisted pair with fiber optic cabling and offer many advanced features for network management.

DREAMSWELL / M1130

PS-7244VM-AT

24-port 10/100/1000M PoE+ with 4 Combo SFP Rack-mount Web Smart Gigabit Ethernet Switch

ETEN / K001-K002

EX78000 Managed Hardened 10-port 10/100/BASE (8 x PoE) and 2-port Gigabit Ethernet Switch

EtherWAN's new EX78000 provides flexibility of 10-port 10/100BASE-TX/FX/BX/SPF plus 2-port Gigabit-TX/SX/LX/SFP with full PoE function. The upgraded EX78000 complies with IEEE802.3at standard providing up to 30 watts power per port and full-loaded with a 180 watts power source. Users can freely configure all 8 PoE ports when connecting with either IEEE802.3af (15.4W/ea) or IEEE802.3at (30W/ea) devices differently. Total numbers of IEEE802.3at PoE ports are now upgraded from 4 to 6. EX78000 Supports EtherWAN α-Ring Technology for Ethernet redundancy and also provides connector options of SC, ST and modular SFP interfaces to match difference applications.

ETHERWAN / K138-K143

Intelligent Active GPRS Remote Terminal Unit with GPS- GT-540P

GT-540P is an intelligent Active GPRS Remote Terminal Unit with GPS that provided by ICP DAS. Within the high performance 32 bit CPU, GT-540P is designed for harsh industrial environment. It is equipped GPRS/GSM module, 6 digital inputs, 2 digital outputs, 1 analog input, 2 RS-232, 1 RS-485 and SD interface. The GT-540P is an ideal solution for environmental monitoring, remote device management and vehicle monitoring system for M2M applications.

ICP DAS / I331, I333

V2070 HD Digital Video Matrix Switcher

Infinova's V2070 makes it extremely easy for integrators to install an HD system that lets customers match the viewing flexibility of video walls in traditional systems. Since traditional matrix switchers cannot handle HD video, the V2070 lets operators have a fully functional HD control room solution with HD (1080P/720P) video inputs and 16 HD video outputs. With no compression, there is no delay in controlling PTZ cameras, a common problem with IP cameras. This major benefit allows security operators to accurately control intricate movements of the PTZ cameras to follow a suspect.

INFINOVA / K100-K101

Transmission

SD-1002/SD-1004, 2-Port/4-Port 3G/HD/SD-SDI Video Splitter

SD-1002/SD-1004, SDI video splitter receives one 3G-SDI, HD-SDI or SD-SDI video signal and duplicates it, and re-transmits it through two/four SDI outputs. With embedded re-clocking design, the video splitter delivers broadcasting quality videos for real-time live view and also extends the video for longer distance. It is a robust SDI video device distributes one SDI input to two SDI compliant devices.

INTELLIVISTA / L1029

3G/SD/HD-SDI Optical Transceiver

The3G/SD/HD-SDI Optical Transceiver is designed for TV industry, with high reliability and high performance. Signal formats from 19.4 Mbps to 2.97 Gbps. The system support signals accord with standards of SMPTE424M,SMPTE292M, SMPTE259M, SMPTE297M, SMPTE305M, SMPTE310M,and support digital TV signals like DVB-ASI (EN50083-9), meeting the industrial and relevant requirements of audio and television products. The function of network management is optional, and the running status of the system can be monitored by inserting just one network-managing card.

JIANGSU HENGSION / M1037

IP-Based Programmable Controller with Digital I/O - WPC-332-DIO

Our WPC-332-DIO is a Web-based Programmable Controller built-in uClinux OS which has DI*8, DO*4, Micro SD, RS-232*3, RS-485*1, RTC, Buzzer and USB host *2 (for memory) which enable users to convert signals to Ethernet, Wireless LAN (Wi-Fi). This module is perfect for highly distributed applications that need a direct connection to an Ethernet network. This product is not only a standard I/O, but also an intelligent system designed with local control functions and a TCP/IP standard for users to easily develop various applications over Ethernet.

KSH / J425, J427

1-Port 10/100/1000 Mbps IEEE 802.3af /at PoE Adapter

Power over Ethernet (PoE) may delivery and transmit data on an Ethernet cable at same time. By eliminating the power cords and the power infrastructure, SS501 greatly simplifies the wiring and deployment bringing lots of convenience and benefits in home, office and industrial environments. SS501 is a Power Sourcing Equipment (PSE) that supply power to the powered device (PD). More and more network attachments today, such as IP Phones, Wireless Access Points, and IP Cameras, are designed as a PD. *Supports 10/100/1000Base-T environment; Compliant with IEEE802.3af /at; Max Power: 15.4W (IEEE 802.3af), 25W (IEEE 802.3at); Support PoE Powered Device (PD) classification identify

LANREADY / K017

IGPS-7084GP

IGPS-7084GP is the DIN-rail managed IEEE 802.3at PoE Ethernet switch with 8x10/100/1000Base-T(X) P.S.E. ports (up to 30W per port) and 4x1000Base-X SFP ports, supporting centralized and visualized network management (Open-Vision v3.0) with Google Map network display. For network security, IGPS-7084GP features hardware-based DDoS auto prevention, plus ORing's proprietary Device Binding, which allows only network traffic from the designated video surveillance device to go through a specific network port. For network stability, IGPS-7084GP has ORing's advanced network redundancy technologies (O-Ring, O-Chain, Open Ring, etc.), providing swift recovery time (< 30 ms) and/or multi-vendor compatibility.

ORING / K902, K904

Transmission

Wireless Control Box for Surveillance–ZW-100

ZW-100 is a versatile and easy to use surveillance device that provides excellent usability and various functions for applications from a distance. You can control the electronic equipment on/off and light power or display their current status without the computer. It can support various IP-CAM to recorded entire event(event triggered event/system triggered event).San Jose also provide a easy-to-used serve service that allow every user to define the setting to ZW-100. This is also stand-along platform without linking service provider's server. The user will feel more secured without worrying the personal dada leaking out. ZW-100 is suitable for office, government, school, corporate, factory, or home users.

SAN JOSE / L1006

Alarm Cable

1. BC Conductor 2. PE Insulated, FR-PVC jacket 3. CE, RoHS certificate 4. Security Alarm Cable, Flame Retardant Cable

SHANGHAI AIPU WATON / M901

IP EXTENDER

High-speed transmission of Ethernet network signals over twisted pair, existing telephone lines and coaxial cable etc. The transmission distance can reach as far as 6000m. 10/100 M network environments compatible. 0-300 meter, rate up to 148M-90Mbps, 1200 m, rate up to 15Mbps. Excellent real-time function, strong anti-interference, easy installation. Both perfect for IP cameras signal extend and old analog surveillance system renovation and upgrade.

SHANGHAI QUNAN / M200

1-CH Ground Loop Isolated Video Balun

Ground loop isolator as well as video balun; Push pin terminal connection;3-Pin, two for UTP cat5e/6; one for ground connection; Color video up to 1312ft(400m) with passive transceiver via UTP cat5e/6 cable; Color video up to 2296ft(700m) with active receiver via UTP cat5e/6 cable; Built-in TVS for surge protection; Lightning protection design Grade:III; Wave Filter Design, Anti-Static Design; Exceptional interference rejection; 50 dB crosstalk and noise immunity; ABS Engineering plastic housing; Dimensions:210*29*20mm (L*W*H BNC connector+ pigtail included)

SHENZHEN FOLKSAFE / L236

2G / 3G Cell Phone Detector

Suresafe new cell phone detectors expose unauthorized cell phone communication, mobile internetting, GSM bug and 3G spy camera. We can detect 3G (UMTS, WCDMA) and 4G (LTE) up to 20 meters, CDMA 800 up to 25 meters. None other is able to compare with in its kind. We have complete line, from personal to professional, to cover all the 2G / 3G / 4G cell phone systems. They are especially suitable: 1. Government establishment, military base, prison 2. Bank, ATM security, financial dept. 3. Security company and service 4. School, Dealing room and R&D offices

SIANGSIU / J503

HD-SDI to HDMI Converter with loop out

SC&T has launched new HD CCTV accessories with HD-SDI to HDMI converter and HD-SDI repeater for long distance. SDI01 is a device designed to convert r HD-SDI signals to HDMI for driving HDMI monitors. This unit also supports embedded SD/HD-SDI audio in the HDMI output, allowing for a convenient single-cable, audio-video connection. It also built in loop through BNC output for HD-CCTV signal. HD-SDI digital video at 720p/60,1080i/60 and 1080p/30 formats/frame rate with high performance digital video and audio without any signal loss. SDI02 HD-SDI repeater could send HD-SDI over 200 meters over RG59 coaxial cable, could be multi repeaters up to 1km application.

SMART CABLING & TRANSMISSION / L001-L002

Transmission

Toolless CCTV Balun (Guarantee 10 Seconds to Install!!)

BL3395 Passive CCTV Video Balun with 12 inch pigtail offers a convenient and cost effective solution for transmitting video signals over unshielded twisted pair (UTP) cables. Installation: Step 1- Insert the cable; Step 2- Close the cap, then done! Unit Feature: Color video up to 2200ft(670m) via UTP Cat.5 cable; Surge Protected ; Anti-Static Design; Compact Dimensions; Flammability 94V-0; No Power Supply Required; No Tool Required; Patented; Limited Lifetime Warranty. Performance: Common Mode Rejection > -43dB @ 8MHz; Insertion Loss < 1dB @ 8MHz; Return Loss > -17dB @ 8MHz.

TELEBOX / M1126

VDC8250

Specifications and features of the 2.4GHz Digital Wireless outdoor CMOS Camera with Receiver which use 16QAM, QPSK, BPSK modulation technology for wireless A/V transmission: Clear, high quality color images; 12 Infra-red LEDs switch on at dusk to provide up to 10m night vision; Operating frequency range from 2400 to 2478 MHz; Maximum 25 hopping channels; Up to 250m transmission range; Supports NTSC / PAL composite Video format; Auto white balance control; 50Hz / 60Hz flicker cancellation; IP65 weatherproof supported for camera side

TRANWO / M912-M913

UniArgus Express Surveillance Server

UniArgus Express Server (UE Server) is a 32-channel network application server with multifunction of video browsing, recording, device controlling, and alarming. It supports major IP camera brands such as Axis, Panasonic, D-Link, Vivotek and many. 4bay hot-swappable 3.5" SATA II HDD tray, HDMI, USB3.0, RAID feature included. SI can use our SDK to integrate with 3rd party systems to provide diversified and customized applications. We are looking for regional distributors. OEM/ODM welcomed! 日本語版もあります

UNISVR / J425, J427

10 bit Fiber Converter

ZL-8100 provides 8 channel high quality video and one channel bi-direction data over 1 single mode or multi mode fiber. We provide uncompressed 10 bit PCM video. We also support data switchable by RS-232/422/485. All series products conform to CE, FCC certification.

ZULITE / L542-L545

Software & Storage

8CH Full HD Network Video Recorder

The compact size standalone NVR can operate independently with local live monitoring, recording, playback and local configuration. It supports up to H.264 High Profile/MPEG-4/MJPEG decoding. The high-efficiency NVR can perform up to 8 CH Full HD real-time recording with multiple recording modes, including scheduled, manual, alarm and continuous recording. Altasec 8CH Full HD NVR provides the best solution for high quality and cost effective network video surveillance system.

ALTASEC / K1008-K1011

Anelesys Mini Network Video Decoder IW-400

The mini embedded network video decoder NVD IW-400 is a device complementary to IP camera and NVR in an IP surveillance system, for live view and display. It supports ONVIF compatible NVR and IP camera. The distributed system structure, decoding function is separated from NVR, not only allows deployment much more flexible and adoptable, but also enables authorization management more easily. It is an excellent choice for building up a monitor-wall for displaying large numbers of camera simultaneously; extra video separator device is unnecessary, this will save you the space, cost and power requirement.

ANELESYS / N818, N820

Software & Storage

Network Security Recorder (NSR)

NSR = Access Control + DVR + Alarm. Network Security Recorder (NSR) embeds multiple functions on one platform, including video record, access control, alarm, interphone, interworking controlling, attendance, patrol, network transmit, real-time monitor, centralized management functions and so on. One NSR alone can fulfill the requirements of a small security project. Several NSR can be deployed to serve big security project. Moreover, embedded system is more stable and low cost.

ANSON (SHENZHEN) / J504, J506

Optimum NVR Kit (AP-KT100S)

AP- KT100S NVR Kit from A-Plus is comprised of a DOM (Disk On Module) with embedded Linux-based NVR software, mounted on a low power consumption motherboard. This comprehensive kit, powered by a 64-bit Linux 3.0 kernel with a wide selection of RAID modes, can support off-the-shelf megapixel IP cameras and ONVIF cameras for up to 64 CH A/V surveillance and recording via Windows, WEB, CMS and Mobile clients, quickly and reliably. With this kit, customers can rapidly build desktop or rack mount NVR with optimum surveillance and operating efficiency; it delivers superior security and stability compared with Windows®-powered NVR systems.

A-PLUS VIDEO / L1117

AxxonSmart PRO

AxxonSmart PRO - Effective video management software for small to medium-sized systems. Video has never been so smart. As Axxon Smart PRO tracks more events in cameras, you can search intelligently. What's more, it knows what to look for, and it interprets events on a continuous basis to identify abnormal and suspicious behavior. It can instantly trigger anything from a simple alarm to a complex series of events - even in software or hardware located outside of the security system itself. Prevent better. Detect sooner. Respond quicker.

AXXONSOFT / N718-N721

7016NA

Full D1 High Definition Video recording and playback; H.264 video compression algorithm; Graphical User Interface, Full mouse control; VGA output 1440*900; Dual Stream, bandwidth transmission control; Integrated alarm control panel; Full Duplex intercom; Graphical index systems on files in search and playback options; Camera and HDD group function; Simultaneous multi-channel playback

BLUESTAR / K012

Reliable Storage Solution for Surveillance Device - SD Card

Basing on years experience on cooperating with global tier one partners to provide industrial grade storage solution, CoreSolid Storage®, the subsidiary of TDK locates in Taiwan has developed reliable Secure Digital(SD), DiskOnModule(DOM), and Solid State Disk(SSD) for surveillance device. Understanding the extreme reliability concern while the surveillance device is recording data, CoreSolid Storage® SD supports hot insertion and removal, content protection mechanism (CPRM), cryptographic security to protect copyrighted data (SDMI), and user-selectable mechanical write-protect. More product information, please contact sales@coresolid-storage.com.

CORESOLID STORAGE / CompoSec Conference

Digital Video Recorder

CTRING has five different kinds of HD-SDI DVR series. V7010 is the lite and compact distribution model with 4ch input which can record at Max. 7FPS per channel. V7100 Series is the world's first 4/8/16CH Full Line up HD-SDI DVR has record rate of 30/60/112fps. Full size Standard model is called V7204 with record rate of 15FPS at 1080p . V7304 model is able to do record realtime at 1080p. The hybrid type, V7214H, has 2HD-SDI inputs with 14 analog inputs. Also CTRING has extensive analog DVRs from cost-effective to D1 Realtime with HD Mux to fulfill the taste of our customers.

CTRING / L824-L825

Software & Storage

DM-1708N/1704N, 8/4-CH Professional Vehicle DVR

The DM-1708N/1704N series are advanced mobile DVRs designed for use as a surveillance system for all types of vehicles. This mobile DVR series applies the latest H.264 compression technology for longer record time and DVD quality video. Their main features include HDD and SD support for different environments, Black-Box functions for safety and control of vehicles, route checking with GPS and serial interface, free E-mapping software and have the best dual-streaming capability for wireless networks. Other added features include touch screen, engine revolution, and speeding pulse support.

DEEPLET / L1016-L1019

DynaGuard™ 900 Series

The network DynaGuardTM 900 series Hybrid IP DVR is a premium DVR supporting 4-channels Full HD IP cameras plus 8/16-channels analog cameras D1 real-time recording/playback. Compatible with network and analog cameras, the DG900 Hybrid IP DVR applies the concept of hybrid connection for flexible surveillance solution, allowing users to upgrade current analog system step by step. In addition, the DG900 Hybrid IP DVR supports IP camera Plug & Play setup and intuitive connection. Installers save much time on cameras setup and trouble shooting. Furthermore, the capability for 1080P display output and megapixel video recording provides high-definition vivid and crystal video.

DYNACOLOR / K314-K321

4/8 CH Intelligent One-Din Mobile DVR-ETSA 964 Series

One-Din, Embedded system, Compact, Fanless, Anti-vibration are designed with cost-effective price for all vehicle applications. It features H.264, D1 resolution; wide power input and low power consumption. Multiple storages selection are supported via USB flash drive and external hard drive for easy back-up. Additionally, it ensures consistent data recording with high stability and map tracking, GPS, WiFi and 3G. Customized is supported on request.

ET&T / L1004

PowerFocus Plus CMS

PowerFocus Plus comes to you as an advanced and smart central management software for IP Solution. Its intelligent video analysis functions, including people counting, virtual fence alarming, missing/foreign object detecting and so on, strengthen your security network. Deploying 1, 2, …, 64, … IP cameras, you are able to flexibly set up your surveillance project no matter it is big or small owe to the multi-server/client feature of the powerful CMS.

EVERFOCUS / N609-N617

FaceID Real-Time D1/720P/1080P NVR

Support HDMI/YPbPr output with high resolution 1920*1080.Compatible with a series of FaceID IP cameras. Support D1,720P and 1080P IP cameras, Built-in DDNS domain name, Free of port forwarding, CMS compatible with iOS, Support mobile surveillance of 5 OS, Connect all cameras via one cable only and easy to use and install. Welcome customization and integration.

FACEID / L812-L815

Security Center – Genetec's Unified Security Platform

Genetec's Security Center is a leading unified security platform. It seamlessly merges our IP license plate recognition (LPR), video surveillance and access control systems into one innovative solution. Manage real-time monitoring, alarm management, and event reporting across all your security systems from a simple task-oriented interface. Bring in additional systems such as intrusion detection and building management, among many more, for a completely unified security and public safety solution. The Security Center is packed with powerful features yet employs a simple and efficient user interface. This combination of power and simplicity creates one of the most advanced unified security platforms available today.

GENETEC / K615-K623

Software & Storage

GDV-VX-CFX (4CH Mobile DVR)

This model works on 4-channel Video/Audio CF card recording and comes with locking front cover and USB Host port for firmware upgrade. The system is also designed with G-sensor port, driver action interface and delay off time switch. Furthermore, the LAN server box can be added and connected for working on live view, notification, wireless download function, etc.

GEORGE TANG / L804, L806

Network Digital Video Recorder

Technology: High performance embedded microprocessor, H.264 video compression. Record & Playback: Support D1+CIF real-time recording, network transmission, and multi-channel synchronous playback. Video output: CVBS/HD VGA output, synchronous output. User Interface: System adopts graphic user interface, support USB mouse, keyboard, and remote control operation. Smart Security: Support alarm, motion detection, Camera Masking, Ball machine linkage etc. Storage: Multiple SATA HDD (per HDD is 2T), Support S.M.A.R.T technology. Network Function: Own DNS (faceaip) resolution, real time pictures-monitoring through viewer. Special Function: Cell-phone monitoring, PIP preview, image freezing, independent channel audio switch, graphic playback interface at client end.

HANGZHOU QIYANG / N914-N915

huperVision 4000 16CH 1080p/ 720p HD-SDI TRIBRID CCTV System

It delivers 16CH 1080p/720p real-time surveillance while preserving coaxial infrastructure and CCTV operation. The exclusively TRIBRID feature allows to connect HD-SDI, CCTV and IP cameras in one single system for different usage scenarios. Running with huperVision intelligent surveillance system, more advanced IVS features are available, such as 2D & 3D people counter, loitering detection, and smoke detection, etc. Along with powerful client programs including huperRemote, huperRemote Phone, and Web Remote Player, the system allows users to view surveillance video from remote computers or mobile devices such as iPhone, Android phones, Blackberry, Windows Mobile, and Symbian phones.

HUPER LABORATORIES / M756-M761

H.264 Network DVR & CCTV Camera

HME provides professional products ideal for the surveillance market, including CCTV camera, DVR, bolt lock and access control etc. Our DVR (4CH/8CH/16CH) use H.264 compression technology of images: good resolution, long record time, fast speed through computer transmission. It supports mobile monitoring and voice warning, single screen/quad display, H.264 monitoring, audio playback, remote relay control, PTZ control, support various of smartphone, e.g. iphone, Android, Windows phone.

HWAN MING / L003-L004

IPX Series

Tired of complicate usage of NVR? Why don't you try ITX unique NVR? Look at its compact and well designed feature. Without saying that it's function. Here is ITX NVR. Need to Display? Just plug –in. No need for IP configuration. Via Built-in PoE Switch Hub, IP camera works. Real-Time Full HD at Live / Playback / Record. Visit ITX Security in Taiwan at N630-635.

ITX SECURITY / N630-N635

SS-HDR-8904 8908 8916

Welcome to visit our booth for our comprehensive range of CCTV Cameras, Mobile DVRs, Stand-Alone DVRs, Hybrid DVRs & Linux-based NVRs. Visit us to find out the quality performance of our range of CCTV products now.

J&S UNITED / L534-L539

Software & Storage

KNR206 – 16 Channel Standalone NVR

KNR206 is the world smallest and robust embedded NVR system, which can handle 16 channels HD IP cameras with full frame without any problem. Furthermore, with tiny size of the enclosure and quiet operation environment, you can easily put KNR206 in any corner of private use or enterprise applications. This is the best products at the market if you are looking for something "powerful" and "friendly".

KOUKAAM / K018-K019

NViS 2280

NEXCOM NViS 2280 is a rugged mobile NVR surveillance system powered by Intel® Atom™ processor D2700. Also with pioneered 4-port Gigabit PoE, NViS 2280 can transmit bandwidth-intensive videos captured from up to 16 channels of high quality megapixel IP CAMs, and support full HD video playback on dual local VGA/HDMI display for real-time surveillance. All functions are performed with high efficiency yet low power consumption. Wi-Fi 3G/G-sensor/BT/GPS are also supported for wireless telematic communication. NViS 2280 also supports wide power input of 9V~36V and is especially suitable for vehicular applications, including public transportation, police cars, trucks and school buses.

NEXCOM / K413-K419

Network Video Recorder (NVR-3210) / iNVR Viewer

PLANET 32-CH Network Video recorder (NVR-3210) is designed for storing recorded video files from IP Cameras. Supporting VGA display, the NVR could be connected with monitors directly, thus it brings users cost-effectiveness without using additional PCs. In addition, with its bundled Central Management Software (CMS), the NVR could manage up to 1024 channels simultaneously. Especially, the PLANET NVR series provide iNVR viewer, the mobile app, allowing users to access the NVRs to remotely view the IP Camera's live video via iPhone / iPad / iPod Touch. Users can also perform playback, search event recording as well as digital zoom.

PLANET / K637-K640

nDVR 540

Plustek nDVR 540 is a digital video recorder surveillance system designed for use with CCTV cameras. Easily integrated with existing analog cams with the user-friendly built-in web interface for set-up, configuration, video previews, live view and playback. This interface is accessible through various web browsers [IE, Chrome, Firefox, Safari, and Opera]; moreover, providing you on-the-go mobile surveillance on iPhone/iPad, and Android systems. Smooth videos streams can be viewed over the internet thanks to the high-speed Giga LAN tunnel and PlustekSecurity FREE DDNS service. Cascading to expand the security system with R806u for up to 32 surveillance channels.

PLUSTEK / K1127-K1130

VS-8148U-RP Pro

The VioStor VS-8148U-RP Pro can simultaneously handle inputs from up to 48 megapixel cameras. Featuring a powerful dual-core Intel® Core™ i3 processor and 2 GB of DDR3 memory, this enterprise-grade NVR delivers high performance with throughput of 360 Mbps for recording and smooth playback of multiple megapixel cameras. Installing with the currently largest 3TB hard drives in the market, the VioStor VS-8148U-RP Pro supports up to 24 TB storage capacity which makes it proficient for continuous recording of high-resolution video. VS-8148U-RP is a future-proof solution which fits nicely in medium to large projects. Capture HD videos with robust and reliable storage from QNAP Security.

QNAP / K202-K205

Software & Storage

nPlus (HD1-1648H)

Rifatron, as DVR manufacturer, is trying its utmost for the technology development and customer satisfaction to be the best security solution company. HD1-1648H, our high-end model, supports various video outputs (HDMI/ VGA/BNC), full channel audio, eSATA, privacy zone mask, panorama playback, RAID 1 or 5, DVD recording, and smart phone viewer (iphone, Android, Blackberry, Windows). And it is a Hexaplexer with Full HD display resolution. MH2 and SH2 have 1080P 15/13 fps (NTSC/PAL), 720P 30/25fps recording resolution and bi-directional audio communication. Also remote setup/backup/relay control and smart phone viewer is available.

RIFATRON / M306-M309

EN208+NVR

Sans Digital VSA manages video assets for long-term retention, whether directly from RTSP enabled IP-cameras or through third party video management software such as Milestone™ ONSSI™ Exacq™ and others. Replication and migration of video files to progressively less-expensive storage mediums, while fully managing the storage location of these video files, allows for rapid search and retrieval of relevant video scenes, regardless of how long ago they were captured.

SANS DIGITAL / N1026

SVR-632 32CH Network Video Recorder

It's a 32-channel standalone NVR that supports 4 HDDs and e-SATA connection, providing total of 20TB of storage with RAID 0/1/5/10. It can record up to 32 x 1.3MP at full frame rate, and comes with VGA output.

SEENERGY / K528, K530

Network Video Recorder

The NVR from Sunell removes the need for historically problematic PC running software to record your IP cameras. It provides a full recording, playback and monitoring solution for IP cameras. With local CMS software a HDMI/ VGA video output. And based on a simple to use GUI via mouse control. With a dedicated hardware platform, using cost effective DSPs, and hardware decoding of H-264 up to high profile level. This device gives the best performance for security requirements. Whilst many companies use PC architecture and perhaps a high end graphics cards as a NVR, typically also using Intel CPUs. Sunell adopt specialist video compression CPU and a totally Sunell designed hardware platform to cater for the single task as a stand-alone NVR device.

SHENZHEN SUNELL / K102-K105

Surveon EMR9000 Enterprise Megapixel HW RAID NVR

Surveon's Enterprise Megapixel Recorders, allied with the most qualified partners in the industry, provide a high performance and reliable platform. Built-in with the world's leading EonStor HW RAID subsystem, the EMR9000 secures the multi-channel megapixel recording performance while keeping the scalability for the maximum of 112 disks. The industrial grade design of XEON Quad Core processor, 2 SAS ports, 6 GLAN and redundant module have made EMR9000 an absolute choice over the commercial PCs and the ideal solution for mission critical surveillance projects, such as hotel, school, bank, factory, transportation, city surveillance and public utility.

SURVEON / K210-K215

HD SDI DVR

TD-2708XD-F is based on ARM11 DUO High-performance processor and Embedded Linux platform. Compared with other products, HD-SDI is an innovation of DVR industry. It supports 4CH SDI 1080P and 4CH CVBS SD real-time display and playback, and supports 4CH simultaneously playback, FF, frame by frame play. It has a colorful client-side firmware, which is a very friendly GUI, windows style, very easy to use. Additional, it supports IE and CMS access, sub stream and main stream live previewing, multi-user online previewing simultaneously, and even supports multiple smart phone remote previewing, such as Iphone, Ipad, Android, Blackberry, Symbian, Windows CE/Mobile, make users more convenient to access the live video anytime and anywhere.

TVT / N702-N709

Software & Storage

Digital Video Recorder

Ultracker New GENERATION DVR with High Definition interface HDMI output for easy connection to a TV. Provide the smallest full-featured DVR in the market. Make you keep in touch with your world-use your smartphone, tablet, PC, or Mac to connect, view and control your system. There are some key features for our DVR: D1 Recording; High Definition HDMI Out @ 1920x1080; Internet Monitoring On PC & MAC; Multi-Touch Interface; Mobile Connectivity; Flexible Installation

ULTRACKER / L600-L603

SC590 N4 SDI

SC590N4 HD DVR Card designs in H/W compressed property and with 4 ports SDI inputs support to make it flexible being applied in the Broadcasting, Education, Medical, Optical, and also in Surveillance market. The maxima video resolution of SC590N4 card is in 960x540@30fps in preview and dual stream providing in 1920 x 1080p@ 30fps +960x540@30fps in recording function, which lets SC590N4 in wide adaptation to cooperate with digital or analog cameras to get video raw data stream doing preview, analysis…etc without CPU workloading. And YUAN also provides its own written driver & SDK for the sofware development.



YUAN HIGH-TECH DEVELOPMENT / L926, L928

Alarm & Access Control

SIP Video Door Phone

Amroad technologies has rolled out products under its network communications platform (OSSON) catering to video door access control, SIP communication, Video IP Phone, home automation control and energy saving control. SIP Video Door Phone (Home) ; SIP Video Door Phone (Community) ; SIP Video Phone ; SIP Indoor Phone ; SIP Cam

AMROAD / J303

OA1000 Mercury

OA1000 Mercury is a genuine breakthrough by Anviz in biometric identification terminals, which fully integrate fingerprint identification, RFID, camera, wireless, multimedia and embedded system technology. Utilizing 3.5 inch industrial TFT true color LCD, Samsung 400MHz Arm9 high speed processor and Windows CE operation system as well as Lumidigm's multispectral imaging sensors. Lumidigm multispectral fingerprint sensors capture fingerprint data beneath the surface of the skin so that dryness or even damaged or worn fingers create no problems for reliable reads. As a result, Anviz biometric readers using Lumidigm sensors can scan through dirt, dust, high ambient light, water and even some latex gloves.

ANVIZ BIOMETRIC / J717-J718

EDIsecure® DCP350 Direct Card Printer

The competitive value line, single-and/ or double-sided, edge-to-edge EDIsecure® DCP350 Direct Card Printer is the perfect solution for all kinds of applications. It ensured with high quality printing results in attractive cards with a professional look. Due to its attractive, robust housing and design the EDIsecure® DCP350 perfectly fits on every desk. Besides, it offers great variety of encoding options such as contact and contactless chip, magnetic stripe. It is optional available with an Ethernet interface. The standard single-side printer is easily upgradable to a dual-side printer at any time.

DIGITAL IDENTIFICATION / J643

Electromagnetic Lock 600LED

The Ebelco 600 Series electromagnetic lock is renown with its excellent holding force and remarkable features. The series is compliance to UL and CE certification. These magnetic locks are widely used for wood doors, iron doors, stainless steel doors, glass doors, and can be controlled by access control system. The advantages of this magnetic locks is made from special magnetic materials in adoption of a particular processing technique that will not produce excessive magnet after a long period, and the sucking board will not be magnetized or causing the reduction of suction force after a long-time used.



EBELCO / J650

Alarm & Access Control

Matrix Keeper - Attendance Access Control System

Matrix Keeper is equipped with a 720 Mhz DSP by TI and a 3.5 inches TFT LCD. This system has twin cameras and the infra-red matrix lighting system. All the components are fit in the compact case. It is built to meet the tough industrial standard to withstand the dust and water. This device is well suitable for indoor and outdoor use. The Matrix Keeper is equipped with the proprietary facial recognition algorithm and the IR matrix illumination system. That could circumvent the environmental lighting problem. There is a real break though of the facial recognition product.

FACE-TEK / J302

FingerTec H2i

The H2i is a simple time attendance and access control device which has a unique screen-less and keypad-less design. Suitable for home use, the H2i is voice guided, guiding the user with its user-friendly voice instructions. The H2i accepts verification in the form of fingerprint, card, or a combination and restricts access effectively with the unique fingerprint matching technology. It can contain 1,500 fingerprint templates, 10,000 card templates, and 100,000 transaction logs, thus proving that it is economical in value, containing only the features that you need. The H2i, just like all FingerTec terminals come with the complimentary in-house advanced management software, the TCMS V2.

FINGERTEC / J711

Key Box with Finger Vein Authentication (FDV-KL Series)

Keys can be lent out/returned safely and simply with Finger Vein Authentication. The position to return the key is indicated with an LED when the key ring (RF Tag). Is read with the reader ; Finger registration capacity: 1,000 Persons (2,000 Fingers) ; History Log: 10,000 events ; Storage capacity: 100keys (Upgradable by 25 key unit) ; Key Control System: Storage Position Control with RF tag ; Control PC: Up to eight PCs can be controlled with control software

FIT DESIGN / J529

Fingerprint Access Control, Time Attendance, Lock Control System (Model GAM110, GLGMG2)

Having the core technology of biometrics (fingerprint sensor and algorithm), we supply access control system and time attendance system. Physical and logical access with biometric solution is the current up to date technology. We have been supplying products of accessing 1:n identification for up to 12k user templates in less than 1.5 second, as well accurate and fast 1:1 verification. The GAM E&M or ZAP program provides easy user interface and DB for customers' time attendance purpose. ZAP provides various DB not only for T&A but also for homologation with surveillance system, CCTV and IP Camera.

GAJEON / J712

PIEZO SIREN • Horn SIREN

HITPOINT are nonetheless well aware that our long term success depends on the following: our ability to develop new products on a regular basis; our ability to provide superior service to our customers. Business Scope: Acoustic Product Department: Manufacturing and Sales of Piezo Electric Buzzers, Piezo Sounders, Piezo Sirens, Magnetic Transducers, Horn Speakers, Horn Sirens, and Piezo Elements. Features: Very high sound output, High reliability and long life, There are models extremely thin-PS-580 series, Various tones and housing combinations. Applications: Alarm systems, Security systems, Automatic equipment, Vehicle back alarms.

HITPOINT / J600, J606

Alarm & Access Control

HCMS+ECU-940

HUNDURE has launched new RFID integration in new application software HAMS, There are including Access Control, Time and Attendance, Parking Control, Patrol and Elevator Control 5 Systems in one platform. In response to the environmental protection, the less consumption of electricity is the core concept. Hundure has combined Access Control system with Power Saving, which in turn contributes to a Classroom/ Conference room / Laboratory/ Dormitory/ Gymnasium / Hotel Electricity Management. To further strengthen security, HUNDURE image capture controller integrates with DVR , NVR, IP Camera to provide image capture and query upon card swipe function, thereby leaving track of events for evidence.

HUNDURE / J137, J139

HG-2500 Wireless Alarm Systems

Features: Easy to Install and Use! Hopping Codes prevents unwanted code grabbing; Support Max. 63 sensors and 3 wired inputs to trigger any DVR and IP cameras. Two way voice communication available. Arm and disarm system by remote control, keypad or any phones. Keypad with LED Back light. Specifications: 1) Frequency: 433 MHz 2) Power source: AC adapter, DC 12V 3) Power consumption: 50mA (idle), 200mA when activated 4) Dimensions: 26 x 17 x 3.5 (cm) L x W x H

NUZON / J608

F007 Biometric Access Control

1) Simple: Fingerprint only, easy to program 2) One relay output: Secure for one door 3) Metal shell, anti-vandal 4) Remote infrared programmer 5) Fireproof, Shockproof 6) Product Dimension: L115mm x W70m x H32mm

SEBURY / J716

INSTEON

INSTEON is the best-selling, most-reliable home control and automation technology. Using both the existing power line in the home and radio-frequency communication, INSTEON adds remote control and automation to lighting, appliance and home control applications of all types. From lighting control to integrated security systems, the new home automation standard allows you to manage your home the way you want. Easy to install and setup. INSTEON offers the flexibility and dependability to make your life more convenient, safe and fun.

SINAC / J403

Metal Access Controller Series

The Metal Access Controller Series, gives a wonderful solution for vandal-proof application by its metal case. The built-in LCD (optional) and illuminated touch panel also allow users a friendly operation. The controller can be used in standalone mode with or without anti-pass-back or, in network mode, connected to a PC host by means of an RS485 link. Moreover, the controller electronics and touch-panel are fully weatherproof complied with IP56 rating. It also has a built-in door relay plus an alarm relay, which is the patent new type relay and avoids vibrating to mis-trigger.

SOYAL / J428, J430

Multiple Function, Doors, Controllers, Network CPU (Central Processing Unit)

High security access control: 16 doors Anti-Pass back; Dual card access; Security doors access by Card with Password. Building Automation control: DI linking functions; 9,999 Parking lot automation; 4,064 units Mail box control

ST ACCESS CONTROL / J416-J418

Alarm & Access Control

Intelligent Emergency Intercom System

Ensure that messages do not miss; All in one Cloud host central control, Intercom, Notify, Broadcasting, Radio control, SCADA (supervisory control and data acquisition); Intranet, Internet, pstn, wifi, mobile (2G, 3G); Remote device connection compatible with Intranet, Internet, PSTN, WIFI, Mobile (2G, 3G); Instant voice messaging to attendant console, cell phone, Soft phone, extension unit, telephone, skype; Low power consumption, simple structure, Stand-alone, multi-application, no integration issues; Applications: Hospital beds intercom, Campus emergency, fire real-time reporting, parking lots, parks, public toilets, Natural disaster warning, Community intercom and control, Neighborhood broadcast, home automation, Security system

SUNTZY / I645

Exquisite RFID Keyfob

The keyfob could be done with a wide range of chips ranging from LF 125khs to HF 13.56Mhz. The material could be ABS or PVC with silk printing or offset printing with clear epoxy covering. Sequential number by ink jet or laser printing is available too. They are waterproof. Suitable use in Access control or gift cards for membership.

TAIWAN BATAG RFID / J654

FP-500 Fingerprint with Proximity Aaccess Control/ Time Attendance Reader

The FP-500 is a Self-contained access control/ time attendance system, it is not only easy installation, but also cost effective. This terminal is capable of operating in both identification (1:N) and verification (1:1) modes. The FP-500 with a big backlit LCD and touch keypad which cause to operate the terminal to be a great and easy thing even at night. The FP-500 offers a storage capacity from 950 to 4,750 persons, each person with two biometric templates, and it supports 20,000 history records when off line the terminal. To check the detail functions, please visit web site http://www.jantek.com.tw.

TAIWAN JANTEK / J132-J135

Goalie Series: Web Based Access Control Management Software

The Goalie Series is a Web based access control management software that supports different Controller models from various vendors integrated into one single software platform. Our Goalie Series has a track record of success having integrated more than 50 access controller models manufactured by more than 10 vendors. The capacity of the system has reached over 1000 devices in one system with proven record of user experiences and satisfaction. This is a system capable of real time data collection from multiple windows of monitoring. By implementing the ACID properties, information security is enhanced and the database consistency ensured.

TQUARK INFORMATION / J531

Elfin Intelligent Community System

Unitech is introduce TASHI, a new IP-based product line that integrates access control, security and intercom applications. It represents Unitech's commitment to provide total security solutions to meet the standards of today and tomorrow. TASHI-Elfin solution has user friendly GUI sets. It is integrated with major standard features such as door phone intercom, security guard intercom, data and voice messaging, broadcasting, intruder & hazard detector alarm, video surveillance, and optional e-Home control. It also links to telephone sets. Elfin is flexible design enables various 3rd party e-Home solutions, and through total IP based architecture.

UNITECH / J304-J307

Alarm & Access Control

BNC- Personal Intelligent Vision Security Device

BNC is an innovative portable security device. Applying Intelligent Vision Security technologies, BNC detects and tracks intruders climbing over Wall/ Window/ Door and at the same time sets off real-time alarm to inform the security guard or the police. Also, BNC detects unwanted movements; for example, if valuables have been missing or moved away from a designated position, BNC will send out unusual-incidents notifications, moving tracks, and statistics to the user immediately. In addition, the number of people who enter and leave the room is provided.

UTECHZONE / M412-M417

ALGATEC – Water Proof Electromagnetic Lock



The ALGATEC Water Proof EM Lock is fully sealed electronic incased with stainless steel. It is suitable for outdoor applications and harsh climate. This water proof EM lock features Lock Status Monitoring, Zero-Residual Magnetism & with Dual Voltage Input, accepting either 12Vdc or 24Vdc. Ease of installation with low maintenance & low energy consumption made it become a cost saving product.

UWC / J431

900MHz UHF Long Distance Reader

Wingsafe Technology provides 900MHz long distance reader on parking management system. Read distance up to 10 meters (depend on tag & condition). The reader has the wiegand interface and you can easily to combine with your access control system. Integration of host and antenna design, dustproof and waterproof, easy to install. Wingsafe also provides many styles of UHF electronic tag for vehicle.

WINGSAFE / J652

Multi Frequency / Long Range Beam Tower

Long sensing range (30/60 meters outdoors); Multi frequency (4 channels selectable); Aluminum housing/PC Resin anti-UV cover ABS side caps; N.C./N.O./COM relay output; Built in beam alignment led indicator; Heater available (optional); Size: 50(W) × 53.5(H) × (635/1,095/1,555/2,015)(H) mm

YUAN-HSUN / J310-J315

Locks

Environment-friendly Door Lock

1) A unique door lock which don't need power or battery 2) With the function of electronic door lock, also with eeconomical price and easy installation 3) Forgot setting code can be retrievable, also can set up different code after find out the codes 4) Forgot setting code can be retrievable, also can set up different code after find out the codes 5) ABA has various barrel to fit this door lock for customer's option

ABA UFO / J415

Janus

Different from regular electronic sensor locks, this design was created to address the various conditions that can occur during user operation. A sleek and minimal sliding cover is skillfully integrated together with a conventional cylinder providing total concealment. It can always be opened even when there is no power or electrical parts are damaged. Heavy duty mortise lock case endures fire with UL 3 hours Fire test and ANSI 156.13 Grade 1 certified.

DUEN YIH METAL / I130, I132

Locks

Lock Systems, Windows/ Door Accessories Parts, Hardware, OEM/ODM

Easier to use, easier to manage! Since 1967, F16 Lock has been engaged in security lock system. Besides our patented 12 pin tumbler, we persist developing high security and new function products to solve your security problem. Now, we bring you an innovating lock system – Reprogrammable Lock system (Magic Lock). It is designed for the security demand resulted from multiple users and frequent transfer. Just contact us and experience its flexibility, convenience and intelligent design.

F16 MFG / J413

Electromagnet Lock, Electric Dropbolt Lock, Electric Strike Lock and Accessories for Access Control

We are one of the Taiwan's leading manufacturers in producing high safety and quality access control hardware products. The company was established in 1992, and specialized in electromagnet locking devices. The main distribution outlets are over than 70 countries across USA, South America, Australia, European Countries, South-east Asia and Middle East, etc. We were among several manufactories to receive the CE and UL attestation, and received with over 20 different countries' patents such as USA, Germany, UK, France, Australia, and Mainland China, which indicates our products meet the needs of almost any security standard in the world.

GIANNI / J516-J521

RFID and Keypad Electronic Door Lock-SKR600

SCG launches its killer product, SKR600, which is based on SCG most popular design of minimalism and consumer inquiries. It combines RFID and Digital code technology providing 3-way unlocking system. With RFID Mifare system, it reaches One-Card solution and brings in possibilities to integrate with many different applications, such as mass transportation system, ID cards, and office security, etc. SCG is a brand by a 30-year-old company in Taiwan, with its insistence of Taiwan Excellence, SCG expands its fame throughout the world. SCG strives to provide not only electronic door locks but also other security solutions, striving to become a solution provider for all human beings.

SUN CASTLE / J411-J412

Hotel Key Card Management System



Exceptional Design of integral body, indicate button, low power consumption; low battery warning. Special specification cards to open the access control, elevator, guest room, and power on the room (One card entry). Use wireless infrared terminal to set/load/read lock's data. The card can be issued upon on different level of authority from hotel manager, supervisor, and front desk clerks to guest cards. Standard 1.5V(AA), no extra wiring required.

UEI HAUR / J528, J530

Electric Locks

Founded in 1992, Vanguard Security has been engaging in developing, manufacturing and marketing high performance Electric Locks (maglocks, strikes, bolt, door holders, keypad, proximity locks, etc) and peripherals (exit buttons, power supplies) with easy install, innovative and quality design for access control and the security industry.

VGSE / J324-J327

ZM 1701 Door Lock

Vision's door lock is Water proof can be installed outdoor, Code numbers can be any combination of digits 2~8 digits long, Warning sounds and keypad shuts down after 4 incorrect code attempts, LED visual feedback message definitions, Indoor/ Outdoor use, 100ft line of sight, the most important thing is it can be operated with Vision's other Z-Wave products. US frequency and EU frequency are available. 3 styles and 3 colors are available.

VISION-ELEC / I652

Locks

e-Link Networking System

The e-Link Networking System is a perfect solution of access control for education, hospital, and commercial. The system is capable of managing up to 64,000 doors and 64,000 users. Adding, deleting of users access rights can all be carried and updated by transponders. The online Wall Controller/Reader works as a hot-spot between PC and transponders. It enables all the offline locks virtual online possible. Audit trail for locks, users and card logs can all be traced in the user friendly e-Link Networking System software. The e-Link Networking System is the best access control solution to serve your security requirements.

WFE / J316-J321

Others

Full-HD IPS Panel RX-55

Built on a 10-bit, 120Hz premium-grade LCD panel, the RX-55 is armed with AG Neovo's AIP technology that reproduces colour and details with an exceptional faithfulness. On top of Anti-Burn-inTM and internal Heat Control Sensor, it also comes with EcoSmart Sensor technologies that ensure round-the-clock operations. Given the display's zoom function, users can easily install a video wall matrix. Crafted with both function and form in mind, it is the aesthetic choice that makes business sense for all sorts of public places and applications.

AG NEOVO / L634-L636

High Resolution LED CCTV Monitor

The Auspice Star LED CCTV Monitor with LED backlight technology is a professional display which is truly environmental-friendly and energy saving. The built-in image enhancer helps reproducing the realistic images faithfully and provides wider range of colors and black level. What's so special LED-Backlit: 4:3 aspect ratio, an ideal display for professional CCTV use; Ultra high dynamic contrast for Depth and Definition; Displays realistic color; Low power consumption, truly energy saving; Environmental friendly, no mercury material; Fit to standard VESA bracket with HDMI, VGA, Audio, 2 BNC input/ output.

AUSPICE STAR / N109-N114

Multi-Cord Cable Glands (IP68 rated)

AVC's smart multi-hole cable glands allow several cables water-tightly to be lead through in one gland simultaneously. From AVC's widest variety size choices, no need to use one gland for each wire, so the spaces of wire entry can be reduced to minimize costs & working time.*Customized multi-hole cable glands design for your IP camera (IP68 rating), the samples available within 10 days.

AVC / M1026-M1027

DF603 Diver Propulsion Device (DPD)

The Seabob Black Shadow 730 is an extreme high performance diving scooter. It is equipped with modern navigation and sonar technology. The SBS 730 is capable of operating in depths of up to 60 meters. With its patented E-jet power system the scooter is provided with high performance jet propulsion. The motor performance of E-jet power system is controlled by 10 power levels. Herby the operator of the SBS 730 can alternate between slow or high speed manoeuvres through the water. Additionally, the SBS 730 is virtually silent and absolutely emission-thereby deployable in all waters.

DAFAR / J510-J514

Others

FC-16W 6" Outdoor and Indoor Dual-use Dome Housing

FAXCONT 6" dome housings are double-decked designed aluminum housings, with build-in thermostatically controlled fan/heater, and compliance to CE, FCC, RoHs, and IP66. In order to provide high quality products to customers, FAXCONT deals housings with die-casting, stainless steel screws on outside of housings, and silicone gasket which provides best water-proof capability; furthermore, with wet-coating that housings look like very elegant and endurable. FAXCONT surveillance enclosures are very flexible for variety combinative packages, and there are arrays of optional accessories and solutions can be chosen. It is Suitable for Panasonic, Vivotek, Canon, ACTi, D-Link, JVC, and Samsung, etc. variety brands' PTZ.

FAXCONT / K006-K008

3.3-inch IR Camera Dome Case

Item No.: SMT-033W-IR. Material: Acrylic and ABS. Color: White and Black are available for dome base, and tinted or transparent color are available for the bubbles. Transparency: greater than or equal to 92%/3mm. Surface roughness: less than or equal to 0.3um/10mm. Available for IR dome camera with 24 lights. Apply to fixed half dome camera or IP camera, available for board camera with size of 32x 32 and 38x38. Available for lens with M12 x 1 interface, focus between 2.8 to 12mm and vari-focus. Self-designed gasket for insulating visible light, cable inserts for trapping the cables.

FUZHOU FRAN M&E / M1000

IECIntraCloud™ Ethernet IP Power/ Infrared Control Box

IECIntraCloud™ Ethernet Power/ Infrared control box provide center control system through the Ethernet remote control. It is easy to scheduling control to the electric equipment power or infrared on off. Such as, set top box, LCD TV, projector, copy machine, printer, heater, air condition or machines which need the Infrared control. This product is suitable for office, government, school, corporate, factory, or home users. It is also suitable for power demanded control equipment, in order to green power and co2 footprint control. (Model Name : IEC-N013)

IECONT / N1004

Solar Collection Cloudy model:Next Generation Solar Collection Energy Online Type Power Generation System

IO-Power USSS-12V1224-OA series is focusing on systems engineering at the time of outdoor construction, was unable to make stable and effective source of power, resulting in project implementation cannot be complete acceptance problems facing proposed integration of the next generation solar collection energy for DC power with high and low temperature resistance of C-LiFePO4 lithium batteries for high current outdoor power consumption load system and special equipment, the design in wet weather environments, has been able to capture a limited DC power and provide batteries and device basic operating power source, solve systems engineering construction cannot get stable outdoors power problems effectively, able to cope with the discharge devices such as camera, infrared cameras, video server, DVR, NVR.

IO-POWER / N827, N829

Edwards High Performance Rotary Gear Pumps

Edwards offers a full range of products from foam and water mist fire pumps to custom-built pumps & pump packages to complete repair & test support. Since 1926, Edwards High Performance Rotary Gear Pumps have been fighting fires. They have earned their reputation for reliability worldwide. Edwards has expertise in the production of bronze and stainless steel foam concentrate pumps and water mist pumps. Edwards Rotary Gear Pumps are ideal for fire protection within petro / chemical, oil field, special hazard, general industrial, military, aircraft hanger, marine, pulp & paper industries and more.

JEXPRESS / I008

Others

HSUPA 402

HSUPA 402 features a simple, handset controlled video surveillance tool. With PIR sensor, it can detect intruder and record it as video clip and send MMS, SMS to your cellular phone by video call. User can call back and see what happened inside of your house, office and etc where it is located. It is a simple, effective, low cost device for general user to find out what happened from any place in the world. With 2 way no delay video communication, it can be used also for meeting, senior care, video monitoring..etc.

LIGHTSPEED / N1027

CI-702

CI-702 is a kind of IP camera housing, duel side locking by clamp with a burglarproof screw, and made of Die Casting Aluminum. The viewing window is made by tempered glass with Insert Patented. The dimensions are 300L x 110H x 100W mm. Also, you can use blower, heater, IR board and antennas with this housing. Certificated with RoHS, CE and IP68. Massload Company is one of biggest CCTV Accessories Manufactures in Taiwan, with large technologies and superior RD and QC team. More information, please visit our website: http://www.massload.com.tw.

MASSLOAD / K844, K846

SLI080 IR LED Illuminator

The all-new SLI080 IR LED illuminator is ideal for long-range cover security applications up to 300m. Featuring the innovative adjustable diffuser and sophisticated LED layout, the SLI080 provides powerful, consistent, and uniform output illumination for more than 100,000 hours. Specifically designed for traffic applications, the unique Shutter Synchronization allows the LED pulse to synchronize with the camera's shutter speed to deliver precise, enhanced lighting at critical moments. The SLI080 yields exceptional nighttime plate-captured images especially when coupled with MESSOA SCR515PRO, the intelligent 600TVL day/ night traffic camera, for the optimized traffic LPR/ ANPR results.

MESSOA / K413-K419

S-H302-IR IR Illuminator

Coupled with super power dot matrix infrared led chip and exquisite craft, S-H302-IR is featured as strong light effect and low light decline, only 5‰ light decline after working 1000hours. Energy saving designed with power factor 0.9-0.98, it decreases reactive power consumption. IP66 weather proof, the maximum power is 74W. 330~70meter IR distance, 15~160degree angle with adjustable assembly bracket. It's able for users to assemble more units together.

SCENE / M1034

LED Traffic Light

IP65 traffic light series: 100mm, 200mm, 300mm; Reduce overall operating & maintenance costs: Energy saving: 90% reduction in power consumption vs incandescent; Reliability & traffic safety: Improved visibility over life of the product Reduces emergency lamps outs Design minimizes sun phantom effects; Easy to install into existing signal enclosure.

SHENZHEN NOBLE / L332-L333

Switching Power Supply

The new ENFORCER PS-U Series is the next generation in 12VDC CCTV power supplies. Featuring all-new circuitry, the power supplies accept 110~240 VAC input, have higher power efficiency, and are much lighter and more cost efficient than current models. Initially, 4, 9, and 18 output models are being offered, with 4 and 9 output models featuring 5A total capacity and 18 output models featuring either 6A or 12A total capacity. All models supply 12VDC at up to 2.5A per channel, come in a heavy duty steel case, offer short circuit and overheat protection, and feature individual channel status LEDs.

SUPERIOR / M512-M513

Vehicle Security: An Emerging Market In Surveillance

As governments grow increasingly concerned over transportation security, the vehicle security market takes the spotlight as the surveillance market continues its rapid expansion. In order to adapt to diverse settings, surveillance products designed for vehicles show four main characteristics: High definition, network connectivity, intelligence and product specialization.

With HD surveillance driving the security industry to set higher standards and technology advances fueling a new generation of products, vehicle surveillance also zooms forward. Performance and image quality have become the main focus in product development for vehicle security. In the process, new business opportunities are also being explored.

Besides strong demand for better image quality, the vehicle surveillance market also requests total solutions rather than individual devices. The diverse settings in which different vehicles operate must also be taken into account, leaving much opportunity for customization and integration services.

The "Vehicle Security Pavilion" is a new zone at Secutech 2012, specially-designed for everything related to onboard surveillance. This pavilion showcases mobile cameras, mobile DVRs, ANPR cameras, specialized security vehicles, vehicle location/ tracking systems and much more. Here you gain purchasing know-how and see total solution packages that will satisfy your diverse sourcing needs.

BX4000

[D-TEG SECURITY CO., LTD. / L800, L802]

The greatest risk while driving is the sheer unpredictability of events on the road. Potential hazards wait around every corner. If you are a taxicab or public transportation operator, hazards may be inside your vehicle as well. With up to 4 high resolution color cameras, GPS, infrared night-vision, up to 3 minutes of pre-alarm recording, and SDHC flash storage (up to 32GB), the BX4000 is as technologically sophisticated as it is practical. BX4000 offers to both commercial and private vehicle operators an effective risk reducing means to aid in the investigation process, decrease collateral damages associated with car accidents, deter crime inside the vehicle, and improve driving behaviors.

4/8 channle innovation mobile DVR

[ET & T TECHNOLOGY CO., LTD. / L1004]

One-Din, Embedded system, Compact, Fanless, Anti-vibration are designed with cost-effective price for all vehicle applications. It features H.264, D1 resolution; wide power input and low power consumption. Multiple storages selections are supported via USB flash drive and external hard drive for easy back-up. Additionally, it ensures consistent data recording with high stability and map tracking, GPS, WiFi and 3G. Customized is supported on request.

EMV200S/EMV400S

[EVERFOCUS ELECTRONICS CORP. / N609-N617]

EMV200S/EMV400S features a built-in G-sensor and H.264 compression. Its compact size allows easy installation. This DVR provides multiple interfaces including two USB ports, wired Ethernet, IR remote control, alarm input per channel and 1 SPDT/Form "C" alarm output. Using shock and vibration resistant D-sub/ Terminal block connectors, it's solid enough for reliable operation even on bumpy roads. EMV200S/EMV400S provides features including real-time video recording with audio, surge protection and voltage regulation, plug-and-play SD card recording, 'virtual fencing' using with external GPS receiver module to track location and much more.

PathFindIR

[FLIR SYSTEMS CO., LTD. / J217,J219]

Thermal imaging cameras for automotive night vision The FLIR Systems PathFindIR is a compact thermal imaging camera that significantly reduces the hazards of night time driving. Automotive Night Vision Systems enable drivers to detect and monitor potential hazards on or near the road, allowing more time to react to any potential danger. PathFindIR Thermal imager helps the user recognize pedestrians, animals, or objects in total darkness, smoke, rain and snow. The PathFindIR module can be integrated into military vehicle designs, or adapted for aftermarket commercial vehicle applications. The PathFindIR is available in 25 Hz PAL / 30 Hz NTSC or 8.3 Hz PAL / 7.5 Hz NTSC

tBOX311-820-FL

[AXIOMTEK CO., LTD. / K138-K143]

Axiomtek rolls out a whole new transportation solution, tBOX311-820-FL, a fanless embedded computing system incorporating extra low power Intel® Atom™ processor Z510PT (1.1 GHz) or Z520PT (1.33 GHz) with Intel® US15WPT chipset. The vehicle pc embedded box computers designed for the extended temperature range from -40 to +55°C and in a rugged profiled-aluminum case. It's built for rugged working environments and meets the demand of vehicle PC applications which requires EN60950, e13 and ISO7637 certified. This innovative unit can perfectly work in mobility control unit, passenger information system, and video surveillance, to ensure public safety and system stability.

DM-1708N/1704N, 8/4-CH Professional Vehicle DVR

[DEEPLET TECHNOLOGY CORP. / L1016-L1019]

The DM-1708N/1704N series are designed for all types of vehicles. This mobile DVR series applies the latest H.264 compression technology for longer record time and DVD quality video. Their main features include HDD and SD support for different environments, Black-Box functions for safety and control of vehicles, route checking with GPS and serial interface, free E-mapping software and have the best dual-streaming capability for wireless networks. Others include touch screen, engine revolution, and speeding pulse support.

10.2" Rear-view Mirror Monitor for Vehicle

[FORESIGHT SYSTEMS TECHNOLOGY / L546,L547]

- 10.2" TFT- LCD PANEL
- Resolution : 640(H) x RGB x 480(V)
- display : Full screen 16:9 <-->4:3
- PAL/NTSC compatible
- Brightness and color , contrast controls
- Dual video inputs (V1 /V2)
- Auto reverse function
- Clip-on holders very easy to install

CDR-E07

[FUHO TECHNOLOGY CO., LTD. / M426-M429]

2CH Vehicle Video Recorder with GPS logger and G-Sensor. Built-in Hi-Sensitive Mic, RTC,
Support Force Record(File Reserved), Password Protect and Watermark.

GDV-VX-CFX (4CH Mobile DVR)

[GEORGE TANG INDUSTRIAL CORPORATION / L804, L806]

This model works on 4-channel Video/Audio CF card recording and comes with locking front cover and USB Host port for firmware upgrade. The system is also designed with G-sensor port, driver action interface and delay off time switch. Furthermore, the LAN server box can be added and connected for working on live view, notification, wireless download function, etc.



HS-MR4000

[HI SHARP ELECTRONICS CO., LTD. / M224-M235]

1.H.264 compression algorithm, low bit rate, high picture quality.
2.Triple stream - individual network video streaming and DVR record streaming.
3.3G phone remote view
4.HDD data retention days / Daylight saving time / NTP supported.
5.Device ID setup for remote controller and control keyboard.
6.DVR control : remote controller, mouse, control keyboard, network.
7.Convenient backup by AVI file.
8.USB or remote firmware upgrade supported.
9.Safari browser operation on MAC.
10.Ignition-off record.

H.264 2CH/4CH/8CH Mobile DVR

[KINGDOM COMMUNICATION ASSOCIATED LTD. / M608-M613]

The MDVR use H.264 codec to reach real D1 Hi-Res. recording.
Product also design with special dual storage for 2.5" HDD & SD card.
We promise the vehicle security with intelligent function such as "GPS / G-Sensor / TPMS data / PTZ protocol / Alarm / Audio …all of log file recording and playback !
Secure and monitor your vehicle on the road with professional VMS to support the strong remote PC-Viewer under 3.75G / Wifi connection.

C3 US military standard anti-vibration - TWITTER

[LEX COMPUTECH CO., LTD. / M418-M423]

C3 US military standard anti-vibration system provided excellent anti-vibration protection under extreme vehicle conditions. The storage space of TWITTER is enough for one commercial standard 2.5 inch HDD with highly reliable protection. TWITTER features excellent heat-dissipating function as well for 24/7 working environment. TWITTER is also an iF design award price winner of 2011 as its anti-vibration design. It's high integration with many possibilities for multimedia playback, wireless connection, driving recorder, and navigation system.

Dual Camera Car Rear Vision System

[HSINTEK ELECTRONICS CO., LTD. / L526-L531]

Hsintek has designed an exclusive dual camera car rear vision system. The camera at top, it can be used as normal rear-view mirror when car is moving, which also doesn't have high beam glare problem. For the camera at bottom side, it extends the rear view angle when the vehicle is reversing. This system can be also automatically change monitor display of cameras by changing gears, so it is very easy and convenience to operate without manually switching camera images.All series of Dual Camera Car Rear Vision System can support DC12V~30V, and it has been patented.



Safe eye Car Blackbox

[HUVITECH CO., LTD. / L005,L006]

Car Black Box is the combination of technologies (Video Cameras, GPS, DVR, G-Shock Sensor) to monitor everything your car does and its environment. It records video and audio, location, date, time, speed, brake application, road conditions, etc. This information can be used to apportion liability in the event of an accident or as evidence in court for defense or prosecution and monitor to correct driver's behavior for safety.

14 Bit Dual Channel Super Wide Dynamic Camera

[MINTRON ENTERPRISE CO.,LTD. / L704-L707]

Mintron's 14bit dual channel camera with 1:100,000 wide dynamic range provides free time-lagging images.
Objects close the host car can be easily recognized to avoid crushes under various monitoring conditions, such as high-range illumination environments. The systems are able to be applied night time city driving, entrance/exit of parking lots, and tunnels. We now integrate the softwares of Front Collision Warning System (FCWS), Lane Departure Warning System (LDWS), Parking Assist System (PGS), into one back mirror.



NViS 2280

[NEXTCOM INTERNATIONAL CO., LTD. / K413-K419]

It includes NViS 2280P4, NViS 3542P8, NViS3220 for in-vehicle, LPR/ANPR, and railway applications at Secutech 2012 in Taipei, Taiwan. NViS 2280P4 is a rugged mobile NVR surveillance powered by Intel® Atom™ processor D2700. With pioneered 4-port Gigabit PoE, NViS 2280P4 can support up to 16 channels of high quality megapixel IP CAMs for full HD video playback on dual VGA/HDMI display for real-time surveillance. NViS 3542P8 is a 8-PoE mobile NVR system featured with Intel® Turbo Boost and Intel® Hyper-Threading technologies, especially designed for License Plate Recognition (LPR) applications for real-time traffic controlling and patrolling surveillance.

EC1407 (ARM1176 @ 700MHz Embedded PC)

[IC NEXUS CO., LTD. / L334]

ARM1176JZF @ 700MHz processor Embedded PC. Support multimedia applications in 1080p video decoding. Support Android 2.3 / Win CE 6.0 / Linux 2.6, and have rich I/O connectors. Our Fanless EC1407 has a variety of application. It could work with Vechiel Display, Kiosk, Digital signage, Factory Automation, Medical equipment, Security system, Gaming device, Hand-held gadget … etc.

H1-01D

[J&S UNITED TECHNOLOGY CORP. /L534-L539]

Welcome to visit our booth for our comprehensive range of CCTV Cameras, Mobile DVRs,
Visit us to find out the quality performance of our range of CCTV products now.

nDVR 540V

[PLUSTEK INC. / K1127-K1130]

Plustek nDVR 540V is designed for public transit applications. Engineered to withstand the often-heavy vibrations generated by the vehicles, the ability to withstand the temperature fluctuations built for dependability, long life, and low maintenance. Easily integrated with analog cams with the user-friendly built-in web interface for set-up, configuration, video previews, live view and playback. This interface is accessible through various web browsers [IE, Chrome, Firefox, Safari, and Opera]; moreover, providing you on-the-go mobile surveillance via iPhone/iPad, & Android systems. nDVR 540V is the requisite choice for mobile surveillance in all types of public and commercial vehicles.

MVR-100-4 3G/GPS [4 CH H.264 Mobile Video Recorder with 3G/GPS)

[PROVIDEO CO., LTD. / K918-K922]

Provideo's MVR100-4 supports G sensor, 3G and GPS for advanced features in mobility. The MVR100-4 provide the AVR supported power source 8 ~ 32 VDC covering most of vehicle or car fleet(s). It also built in 3G modem to support video with GPS tracking that allows users to remotely locate and track a vehicle.
Provideo MVR-100 is available with an emergency button with 2-way audio function, the device offers the driver the ability to press the button and talk to headquarters when any assistance is required or during an emergency.

Complete GPS tracking solution: GS-818

[SAN JOSE TECHNOLOGY, INC. / L1006]

SANAV GS-818 GPS/GSM/GPRS Vehicle Tracker is suited for vehicle tracking with fixed mounting and I/O connections in the vehicle. Its wide usage including Transportation, Taxi management, Law enforce¬ment, Car rentals, etc. GS-818 features SiRF GPS chipset and Siemens Cinterion GSM module. Both are high-end solution that provides far more reliable GPS accuracy and consistent data communication. The device can report based on user-defined Time, Speed, Distance, or Movement. Our newly added GSM Jamming detection will prevent car theft.

HD-SDI Vanda-proof Dome Camera

[SHENZHEN IVT CO., LTD. / L136,L137]

- 1/3" Panasonic CMOS, 1080p/30fps, 720p/60fps;
- HD-SDI Video Output
- 2.8-10mm Vari-focal Lens;
- Built-in Service Video Out
- 3-Axis Gimbal
- 21pcs IR LED, 15M IR Range
- Smart IR/WDR/BLC/HLC

Vehicle DVR

[TELEXPER INTERNATIONAL INC. / N806-N809]

Vehicle 168 Embedded Mobile DVR provides shock-and-vibration resistant, weather-dust proof (IP54), 7W-low-power consumption and aluminum fanless design of Telexper's 4-channel Vehicle 168 DVR are ideal for fleet management. With 3G transmission module (TX-1) and Mobile Center central monitoring software, you will have easy tracking of all vehicles on E-map, up-to-the-second monitoring, complete real-time recording of activities, instant emergency assistant and driver's behavior evaluation. Vehicle 168 DVR supports 2.5" 1TB hard disk storage, which is removable for offline playback and simple video export via USB 2.0.

TD51XX MDVR

[TVT DIGITAL TECHNOLOGY CO.,LTD. / N702-N709]

This model MDVR H.264 with low bit rate, Dual stream, SATA interface, GPS, 3G and WIFI function, travelling record etc. Its measure strictly adopts standard IDIN structure which makes it easy to be installed in the DVD player slot of the vehicle or on the other places in the vehicle through installing holders. Additionally, this series of device are used of Aluminum alloy materials which can cool the device effectively and protect the SATA disk. The independent pluggable hard driver box is much convenient for data backup and management. Due to these distinctive characteristics, it is widely used in taxies, police cars, cash trucks, container trucks, coach, buses and so on.

VAE 740 Blind Spot Detection System

[VISION AUTOMOBILE ELECTRONICS INDUSTRIAL CO., LTD. / I652]

Vision's Blind Spot Detection System can pre-warn approaching vehicles in their side "blind spot" when changing Lanes to avoid or reduce the accident severity of side-related accidents. The system pre-warns driver by using the relative speed between the host vehicle and the approaching possible threat vehicle to issue an visual alert.

Full HD 1080P Vehicle Recorder- RYK9123

[YOKO TECHNOLOGY CORP. / K906-K911]

YOKO vehicle recorder will be able to work as video evidence which minimizes ambiguity or false accusations when accident occurred!
The YOKO RYK9123 features a high definition 1080P - 5.0 megapixel video recorder with 120 degree viewing angle, H.264 loop recording, photography, 4x digital zoom, storage via up to 32GB MicroSD memory card, built-in microphone and speaker, HDMI, 2.0" LCD as well as vehicle time date stamp on video. With the above significant features, the recorder also can be used in carrier, taxi, bus and security company.

Camera Excellence Award

DVR/ NVR Excellence Award

Lens Excellence Award

Which are World's Excellent *Megapixel Lens*, *HD Camera* and *DVR/ NVR*?

Let's decide winners of Secutech Award 2012!

When the security industry is moving towards HD surveillance, numerous collections of cameras, DVR/NVR and lens with excellence image quality and featured performance are ready to launch. As the world's biggest shopping ground for IP & HD surveillance, Secutech 2012 is going to impress you with a lineup of live video shootout and help you acquire purchasing know-how by gathering products from global brands.

In 2012, the award lineup includes Camera Excellence Award, DVR/NVR Excellence Award and Lens Excellence Award. A default environment in full consideration of objectiveness will be set respectfully for the three contests to ensure an open and fair competition.

Cast your crucial vote at Secutech 2012 Onsite!

Date	April 18- 19, 2012 (Public Poll); April 20, 2012 (Award Ceremony)
Venue	4th floor of show ground (Taipei Nangang Exhibition Center)

Pre-registration now: http://www.secutech.com/registration/en

Organizer contact:

Messe Frankfurt New Era Business Media Ltd. Taiwan Branch

Ms Veronica Chen / Show Manager

Tel: +886-2-26599080 ext 777

veronica.chen@newera.messefrankfurt.com



World's important sourcing platform for security parts, accessories, equipments and solutions

560 exhibitors | over 35,800 sqm | 1700 booths | 3000 kinds of security products

Secutech is one of the world's major security exhibitions where buyers can build strong partnerships with manufacturers. **The 2012 show, with an exhibition space of 35,873 spm and 560 exhibitors,** will offer the perfect platform for sourcing partnerships and the discovery of new security trends and niche markets, which are key to staying ahead of the competition.

The show, which began in 1998, covers the **complete supply chain from components, products, software and solutions** to security channels and business units, making it easy for buyers to compare the many products and technologies on display.

- ❶ IP Cameras, NVRs, Display, Network Transmission
- ❷ Digital HD Surveillance, CCTV, 960H Cameras, HD SDI DVRs
- ❸ Mobile Cameras, DVRs, Vehicle Security Solutions
- ❹ Components, Parts and Accessories
- ❺ Electronic Locks, Biometrics, Cards & Readers
- ❻ Made in Taiwan Fire Protection Products

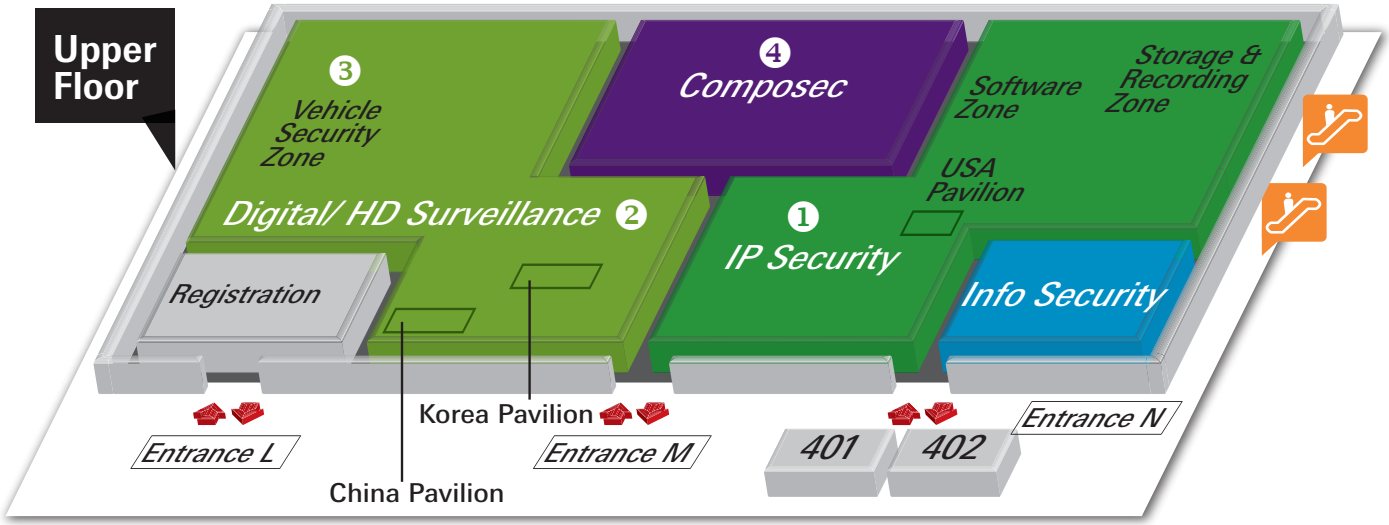

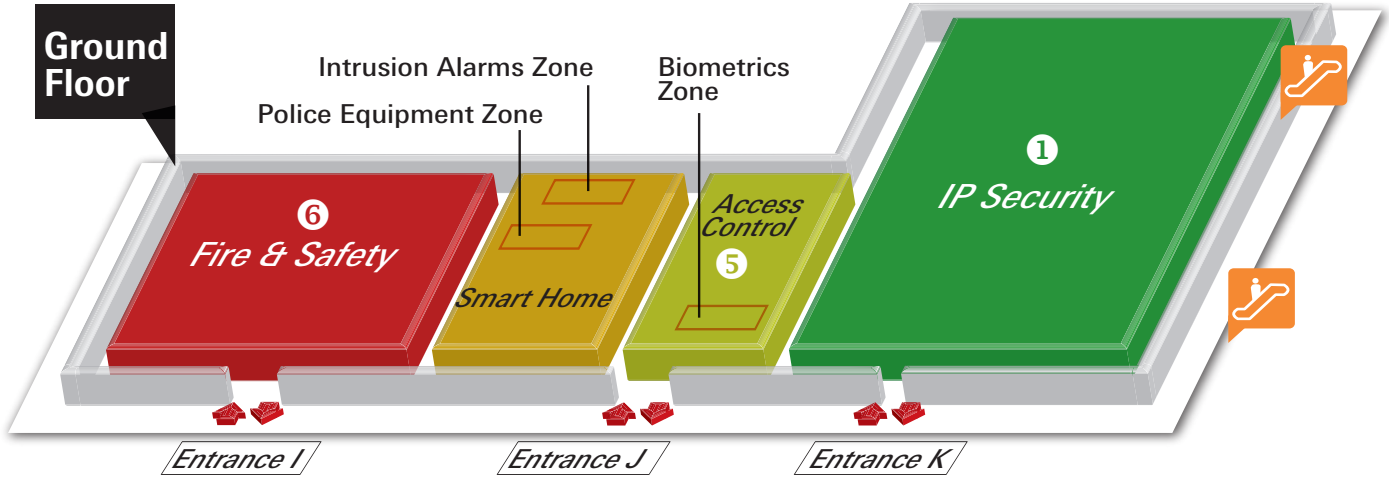

Organizer
Messe Frankfurt New Era Businesss Media Ltd.
Tel: +886 2 2659 9080
Fax:+886 2 2659 9069

Exhibitor List

Secutech

3S VISION	L604-L607
ABA UFO INTERNATIONAL CORP.	J415
ACCORD CO., LTD.	J429
ACCORDANCE SYSTEMS INC.	N819-N821
ACTIONTOP ELECTRONICS (SHENZHEN) CO., LTD.	N102-N105
ACULA TECHNOLOGY CORP.	M146-M149
ACUMEN INT. CORP.	M616-M624
ADVANCE VISION ELECTRONICS CO., LTD.	K200-K201
AFREEY INC.	K935, K937
AG NEOVO	L634-L636
AGNI TECHNOLOGY INC.	K400-K403
ALCON TELECOMMUNICATIONS CO., LTD.	K010-K011
ALINKING	K328-K331
ALPHA PRICING CO., LTD.	L500-L511
ALTASEC TECHNOLOGY CORPORATION	K830-K834
AMROAD TECHNOLOGY INC.	J303
ANELESYS CO., LTD.	N818, N820
ANSON (SHENZHEN) TECHNOLOGY CO., LTD.	J504, J506
ANVIZ BIOMETRIC TECH.CO., LTD.	J717-J718
A-OPTRONICS TECHNOLOGY INC.	L1120
A-PLUS VIDEO TECHNOLOGYES, INC.	L1117
APPRO PHOTOELECTRON INC.	L826, L828
AREA ENERGY INC.	J644
ARECONT VISION	J424, J426
ASIA SMART TAG CO., LTD.	J709-J710
ASON-CCTV INDUSTRY CO., LTD.	L924-L925
AUSPICE STAR CO., LTD.	N109-N114
AVEDIA	K1117-K1118
AVER INFORMATION INC.	K324-K327
AVICO CO., LTD.	L340-L341
AVIOSYS INTERNATIONAL INC.	K015-K016
AXIOMTEK CO., LTD.	K138-K143
AXXONSOFT ASIA PTE LTD.	N718-N721
BIG GOOD HOLDINGS LIMTED	M321-M329
BIWAVE TECHNOLOGY, INC.	N506-N507
BLUESTAR SECUTECH, INC.	K012
BOOTSTRAP FIGHT DIT TECHNOLOGIES CO., LTD.	J656
BRAINCHILD ELECTRONIC CO.,LTD.	K1123-K1124
BRICKCOM CORPORATION	K108-K121
CHAINS TECHNOLOGY CO., LTD.	K006-K008
CHANCE-I CO., LTD.	L827, L829
CHANGZHOU HUALONG COMMUNICATION TECHNOLOGY CO., LTD.	L343
CHINA LONRUN DI-TE CO(GZ) LTD	M542
CHINA SECURITY & SURVEILLANCE TECHNOLOGY INC.	M212-M223
CHING JER ELECTRON CO., LTD.	L920-L921
CHIYU TECHNOLOGY CO., LTD.	J329, J331
COMPRO TECHNOLOGY, INC.	K306-K313
CTRING CO., LTD	L824-L825
C-WELL VISION CO., LTD.	L1012, L1014
DAFAR INTERNATIONAL INC.	J510-J514
DAIWON OPTICAL CO., LTD.	N1018, N1020
DECISION GROUP INC.	N1117
DEEPLET TECHNOLOGY CORP.	L1016-L1019
DEVLINE LIMITED	N710-N715
DIGITAL DATA COMMUNICATIONS ASIA CO., LTD.	K700-K701
DIGITAL IDENTIFICATION SOLUTIONS PTE LTD.	J643
DINTEK ELECTRONIC LTD.	L1020-L1021
DONGYANG UNITECH CO., LTD.	N802, N804
D-TEG SECURITY CO., LTD.	L800, L802
DUEN YIH METAL INDUSTRIAL CO., LTD.	I130, I132
DYNACOLOR INC.	K314-K321
EBELCO INDUSTRIES SDN. BHD.	J650
ECOA TECHNOLOGIES CORP.	J402
EEE-STREET CORPORATION	K024
ELYSIUM CO., LTD.	L610-L615
ENCONN_ETHERNET OVER COAX SOLUTION	L546-L547
ET & T TECHNOLOGY CO., LTD.	L1004
ETEN TECHNOLOGIES INC.	K001-K002
ETHERWAN SYSTEMS INC.	K138-K143
ETROVISION TECHNOLOGY CO., LTD.	K1116
EVERFOCUS ELECTRONICS CORP.	N609-N617
EVERSPRING INDUSTRY CO., LTD.	J102-J105
EVERYANG TECHNOLOGY CO., LTD.	J705
EXLAND TECHNOLOGY CO., LTD.	M238-M241
EYEVIEW ELECTRONICS CO., LTD.	N502-N503
EZ DUPE INC.	N1026
F16 MFG CO., LTD.	J413
FACEID TECHNOLOGY CO., LTD.	L812-L815
FACE-TEK TECHNOLOGY CO., LTD.	J302
FINEST SECURITY SYSTEM CO., LTD.	K500-K503
FINGERTEC WORLDWIDE SDN. BHD.	J711
FIT DESIGN SYSTEM CO., LTD.	J529
FLIR SYSTEMS CO., LTD.	J217, J219
FORESIGHT SYSTEMS TECHNOLOGY	L546-L547
FORMOSA WIRELESS SYSTEMS CORP.	N1110, N1112
FUHO TECHNOLOGY CO., LTD.	M426-M429
FUJIAN FORECAM OPTICS CO., LTD.	K600-K605
FUZHOU DEVELOPMENT ZONE HONGFA OPTOELECTRONICS TECHNOLOGY CO., LTD.	M201
GAJEON CO., LTD.	J712
GEORGE TANG INDUSTRIAL CORPORATION	L804, L806
GEOVISION INC.	K506-K513
GIANNI INDUSTRIES, INC.	J516-J521
GIGA-TMS INC.	J328, J330
GKB SECURITY CORPORATION	L616-L624
HANGZHOU QIYANG TECHNOLOGY CO., LTD.	N914-N915
HARDWARE & SOFTWARE TECHNOLOGY CO., LTD.	J136, J138
HDPRO CO., LTD.	M625-M633
HEWLETT-PACKARD (SALES) PTE. LTD.	N515
HI SHARP ELECTRONICS CO., LTD.	M224-M235
HIKVISION DIGITAL TECHNOLOGY CO., LTD.	M312-M320
HITPOINT INC.	J600, J606
HSINTEK ELECTRONICS CO., LTD.	L526-L531
HUB TECHNOLOGY CO., LTD.	L232
HUNDURE TECHNOLOGY CO., LTD.	J137, J139
HUNT ELECTRONIC CO., LTD.	N1022
HUVITECH CO., LTD.	L005-L006
HWAN MING ENTERPRISE CO., LTD.	L003-L004
IC NEXUS CO., LTD.	L334
ICP DAS CO., LTD.	I331, I333
IECONT TECHNOLOGY INC.	N1004
IMEGE	K422-K427
INFINOVA (HONG KONG) LIMITED	K100-K101
INTELLIVISTA TECHNOLOGY	L1029
IO-POWER TECHNOLOGY CO., LTD.	N827, N829
IPROSECU CORPORATION	K1115
ITX SECURITY CO., LTD.	N630-N635
J&S UNITED TECHNOLOGY CORP.	L534-L539
JAREYMOBILE	J607
JEXPRESS INTERNATIONAL LLC	I008
JIANGSU HENGSION ELECTRONIC S&T CO., LTD.	M1037
J-LINK INDUSTRIAL(HK) LTD	M543
JOINT SECURITY CO., LTD.	K013-K014
JOINT SECURITY SUPPLIES LTD.	I653
JUSUN INSTRUMENTS CO., LTD.	USA Pavilion
KANRICH ELECTRONIC CORP.	J404, J406
KINGDOM COMMUNICATION ASSOCIATED LTD.	M608-M613
KOANGYOW INTEGRATION MACHINE CO., LTD.	L916-L919
KOUKAAM A.S.	K018-K019
KSH INTERNATIONAL CO., LTD.	J425, J427
KT&C CO., LTD.	M522-M527
LA VIE SECURITY INTERNATIONAL CO., LTD.	J704
LANREADY TECHNOLOGIES INC.	K017
LAWMATE INTERNATIONAL CO., LTD.	N016-N018
LEE MING INDUSTRIAL CO., LTD.	L1121
LEX COMPUTECH CO., LTD.	M418-M423
LIGHTSPEED INTERNATIONAL CO.	N1027
LOOPCOMM TECHNOLOGY.	K903, K905
MASSLOAD CO., LTD.	K844, K846
MATROX GRAPHICS INC.	L927, L929
MERIT LI-LIN ENT. CO., LTD.	K626-K636
MESSOA TECHNOLOGIES INC.	K413-K419
MIAXIS BIOMETRICS CO.,LTD.	K707
MICETEK INTERNATIONAL INC.	K705
MICRO DIGITAL INC.	K643-K648
MICRONET COMMUNICATIONS INC.	K003-K005
MING FORTUNE INDUSTRY CO., LTD.	L1024-L1025
MINTRON ENTERPRISE CO., LTD.	L704-L707
MULTICE & CO., LTD.	M506-M507
NEXTCHIP CO., LTD.	M206-M209
NEXTCOM INTERNATIONAL CO., LTD.	K413-K419
NIETZSCHE ENTERPRISE CO., LTD.	I531
NIMAX TELECOM CO., LTD.	L1124, L1126
NOBEL ELECTRONIC & MACHINERY CO., LTD.	J419-J423
NUUO INC.	L514-L522
NUZON TECHNOLOGY INC.	J608
OPTELECOM-NKF	L542-L545
OPTICAL SYSTEMS DESIGN PTY LTD.	M533-M535
OPTIMAL DSP TECHNOLOGY CO., LTD.	L1026, L1028
ORING INDUSTRIAL NETWORKING CORP.	K902, K904
ORION TECHNOLOGY CORP.	L1228
OVISLINK CORP.	K300-K303
PINETRON CO., LTD.	M637-M642
PISHION INTERNATIONAL CO., LTD.	M516-M521
PIXORD CORPORATION	K606-K608
PLANET TECHNOLOGY CORPORATION	K637-K640
PLUSTEK INC.	K1127-K1130
PROBE INC.	M106-M109
PROVIDEO CO., LTD.	K918-K922
QIHAN TECHNOLOGY CO., LTD.	L810-L811
QNAP SECURITY	K202-K205
QUICKEN SYSTEM INTEGRATION CO., LTD.	K615-K623
RAYLIOS TECHNOLOGY INC.	K936,K938
RIFATRON	M306-M309
RING LINE CORPORATION (WINPOWER)	J620-J624
RONIX	N902, N904
ROTASUN MECHANICAL INDUSTRY CO., LTD.	J524-J527
SAN JOSE TECHNOLOGY, INC.	L1006
SCENE ELECTRONICS CO., LTD.	M1034
SCIENTECH ELECTRONICS CO., LTD.	I530
SEBURY TECHNOLOGY CO.,LTD.	J716
SECURITAG ASSEMBLY GROUP CO., LTD.	J216, J218
SEENERGY CORP.	K528, K530
SHANGHAI BAOYA SAFETY EQUIPMENT CO., LTD.	I006
SHANGHAI QUNAN ELECTRONICS CO. LTD.	M200
SHANY ELECTRONIC CO., LTD.	N639-N644
SHENZHEN BESTECH ELECTRONICS CO., LTD.	L344-L345
SHENZHEN D-VITEC INDUSTRIAL CO., LTD.	L240
SHENZHEN EASYN TECHNOLOGY CO., LTD.	M100-M101
SHENZHEN FENGTAIDA ELECTRONICS CO., LTD.	N810-N813
SHENZHEN FOLKSAFE TECHNOLOGY CO., LTD.	L236
SHENZHEN IVT CO. LTD.	L136-L137
SHENZHEN NOBLE OPTO CO., LTD.	L332-L333
SHENZHEN SUNELL TECHNOLOGY CORPORATION	K102-K105
SHENZHEN TUNGSON AGES TECH CO., LTD.	N1014-N1015
SHENZHEN VITORIA VIDEO TECHNOLOGY CO., LTD.	L342
SHENZHEN WAVE-PARTICLE TECHNOLOGY CO., LTD.	K1014-K1017
SHENZHEN YOUGUAN CCTV TECHNOLOGY CO., LTD.	M432-M435
SIANGSIU INDUSTRIAL CORP.	J503
SICAM SYSTEMS LTD.	N1126
SINAC TECHNOLOGY INC.	J403
SINOIVISION DEVELOPMENT CO., LTD.	L134
SJ MICROTECH CO., LTD.	M304-M305
SMART CABLING & TRANSMISSION CORP.	L001-L002
SMAX TECHNOLOGY CO., LTD.	K514-K521
SOCA TECHNOLOGY CO., LTD.	J213, J215
SOEST	N022
SOYAL TECHNOLOGY CO., LTD.	J428, J430
ST ACCESS CONTROL SYSTEM CORP.	J416-J418
STARVEDIA TECHNOLOGY INC.	K524-K527
STL SECURITY LTD.	k800-K805
SUN CASTLE GLOBAL PRECISION TECHNOLOGY CO., LTD.	J411-J412
SUNNIC TECHNOLOGY & MERCHANDISE INC.	K406-K412
SUNTZY TECHNOLOGY	I645
SUPER PILOT ENTERPRISE CO., LTD.	L1125
SUPERIOR ELECTRONICS CORPORATION	M512-M513
SURVEON TECHNOLOGY INC.	K210-K215
SYNOLOGY INCORPORATED	K649-K652
SYRIS TECHNOLOGY CORP.	J212, J214
TAIWAN BATAG RFID TECHNOLOGY CO., LTD.	J654
TAIWAN COLOUR & IMAGING TECHNOLOGY CORPORATION	N1002
TAIWAN EXTERNAL TRADE DEVELOPMENT COUNCIL, TAITRA	J121-J130
TAIWAN JANTEK ELECTRONICS, LTD.	J132-J135
TAIWAN SECURITY NET CO., LTD.	I650-I651
TAIWAN VIDEO SYSTEM CO., LTD.	M140-M143
TAMRON CO., LTD.	L628-L633
TELEXPER INTERNATIONAL INC.	N806-N809
THECUS TECHNOLOGY CORP.	K838-K841
TOUCHLIFE TECHNOLOGY CO., LTD.	I131, I133
TQUARK INFORMATION CO., LTD.	J531
TRICLOUDS TECHNOLOGY CO., LTD.	K023
TU SHING ELECTRONIC CO., LTD.	M508-M511
TVT DIGITAL TECHNOLOGY CO., LTD.	N702-N709
TYCO SECURITY PRODUCTS ASIA PACIFIC HEADQUARTER	N600-N603
UEI HAUR ENTERPRISE CO., LTD.	J528, J530
ULTIMA PRECISION CO., LTD	J502
ULTRACKER TECHNOLOGY CO., LTD.	L600-L603
UNION COMMUNITY	I228-I229
UNION OPTECH CO.,LTD	L335
UNISVR GLOBAL INFORMATION TECHNOLOGY CORP.	J425, J427
UNITEC TECH ENTERPRISE LTD.	J419-J423
UNITECH ELECTRONICS CO., LTD.	J304-J307
UNITECHNO CORPORATION	L432-L437
UPS INTERNATIONAL INC., TAIWAN BRANCH	N514
UTECHZONE CO., LTD.	M412-M417
UWC ELECTRIC (M) SDN BHD.	J431
VANGUARD SECURITY ENGI CORP.	J324-J327
VIDO SECURITY SYSTEM CO., LTD.	M204-M205
VISION-ELEC. TECHNOLOGY CO., LTD.	I652
VIVOTEK INC.	K122-K135
WFE TECHNOLOGY CORP.	J316-J321
WINGSAFE TECHNOLOGY INC.	J652
WISPRO INTERNATIONAL CO., LTD.	J713
WONWOO ENGINEERING CO., LTD.	M600-M605
WUHAN GUIDE INFRARED CO., LTD.	L237
X-CORE TECHNOLOGY CO., LTD.	N724-N727
XIAMEN LEADING OPTICS CO., LTD.	K1012-K1013
YODA COMMUNICATIONS, INC.	N1118
YOKE INTL-COM CORPORATION	J641-J642
YOKO TECHNOLOGY CORP.	K906-K911
YUAN HIGH-TECH DEVELOPMENT CO., LTD.	L926, L928
YUAN-HSUN ELECTRIC CO., LTD.	J310-J315
YU-HENG ELECTRIC CO., LTD.	J310-J315
ZAVIO INC.	K843, K845
ZERO ONE TECHNOLOGY CO., LTD.	K529, K531
ZHEJIANG DAHUA TECHNOLOGY CO., LTD.	M717-M728
ZHONGZIVILLE DEVELOPMENT LIMITED	N012-N013
ZULITE CORPORATION	L542-L545
ZHEJIANG DAHUA TECHNOLOGY CO., LTD.	M717-M728
ZHONGZIVILLE DEVELOPMENT LIMITED	N012-N013
ZULITE CORPORATION	L542-L545

Composec

APACER TECHNOLOGY INC.	M818-M821
AVC INDUSTRIAL CORP.	M1026-M1027
BASO PRECISION OPTICS LTD.	M903
DREAMSWELL CO LTD.	M1130
EXPLUS CO., LTD.	M1112
FUZHOU FRAN M&E TECHNOLOGY DEVELOPMENT CO., LTD.	M1000
GENNUM CORPORATION	M1036
GEO SEMICONDUCTOR INC.	M1108
GIFAR TECHNOLOGY CO., LTD.	M1001
GIGAWAY TECHNOLOGY CORP.	M1003
GRAIN MEDIA, INC.	M926, M928, M930
HUPER LABORATORIES CO., LTD.	M756-M761
HYVIEW TECHNOLOGY CO., LTD.	M906-M909
INTEL	M729-M740
INTERSIL	M744-M752
MIYO TECHNOLOGY CO., LTD.	M1028, M1030
NATIONAL CHIAO TUNG UNIVERSITY	M835, M837
PIXELPLUS CO., LTD.	M900, M902
SERIAL MICROELECTRONICS INC.	M914-M917
SHANGHAI AIPU WATON ELECTRONIC INDUSTRIES CO., LTD.	M901
SOLIDTEK. INC.	M801, M803
STAR OPTICAL CO., LTD.	M1102
STRETCH INC.	M800, M802
TELEBOX INDUSTRIES CORPORATION	M1126
TRANSCEND INFORMATION, INC.	M814-M817
TRANWO TECHNOLOGY CORP.	M912-M913

The cut-off date for the above Exhibitor List is Jan. 17, 2012.
For more exhibitors' info, please check www.secutech.com.

Secutech 2012 Visitor Registration Form

Online Register: www.secutech.com or FAX TO: +886 2 2659 9069

Please fill in the following personal information (or attach your business card) and finish the questionnaire accordingly.
Upon receiving your registration form, we will send out the registration notice via email.

Company Name :

Name : First Name Middle Last Name Prefix : Mr. Ms. Dr.

Email : To ensure you will receive notices from the organizer, please confirm the email address is correct

Password : Only use for proceeding visitor registration; more than 6 digits / characters

Department : Job Title :

Address : Room Floor Building Road / Street

District City Zip State / Province Country

Tel : Country Code : Area Code : Number : Ext :

Fax : Country Code : Area Code : Number :

Mobile : Website :

1. The show you want to attend (multi. Ticks)

- ☐ Secutech
- ☐ Fire&Safety
- ☐ Composec
- ☐ Info Security

2. Your Business Nature (multi. Ticks)

- ☐ Manufacturer
- ☐ System Integrator
- ☐ Export Service
- ☐ Consultant
- ☐ Importer/Distributor
- ☐ Branch Office/Subsidiary
- ☐ Dealer/Reseller
- ☐ Security Service
- ☐ Installer
- ☐ Other _____

3. For security industry player, is your company involved in the IT or networking Industry?

- ☐ Yes
- ☐ No

4. Employee number of your company (Single Tick)

- ☐ 1~25
- ☐ 26~50
- ☐ 51~100
- ☐ 101~250
- ☐ 251~500
- ☐ 501~1000
- ☐ more than 1001

5. Your department & management level

5.1 Primary job function (Single Tick)

- ☐ Purchasing
- ☐ R&D
- ☐ Executive Management
- ☐ Marketing
- ☐ Sales
- ☐ MIS
- ☐ Project Design
- ☐ Factory Safety
- ☐ Risk Management
- ☐ Others _____

5.2 Management level (Single Tick)

- ☐ Executive Management
- ☐ Senior Management
- ☐ Other Management
- ☐ Professional specialist/technician
- ☐ General Staff

5.3 For a "Professional specialist/technician", please select your territory (Single Tick)

- ☐ Electricity
- ☐ Fire
- ☐ Security Management
- ☐ Water
- ☐ Architect
- ☐ Industrial Safety
- ☐ Refrigeration and Air Conditioning
- ☐ Others _____

6. Your purchasing authority (Single Tick)

- ☐ Final/Crucial decision
- ☐ Recommend/Evaluate
- ☐ Specify Initial Selections
- ☐ None

7. Purposes of visiting Secutech (Multiple Ticks)

- ☐ Look for distribution / dealership opportunity
- ☐ Look for OEM / joint-venture partners
- ☐ Purchase or source products
- ☐ Collect market information
- ☐ Attend international conferences
- ☐ Others

8. What is the budget for your company to purchase security products in 2012?

- ☐ Not enough USD 30,000
- ☐ USD 30,000-160,000
- ☐ USD 160,000-330,000
- ☐ USD 330,000-1,000,000
- ☐ USD 1,000,000-1,660,000
- ☐ More than USD 1,660,000

9. Products to source or survey (Multiple Ticks)

*Electronic Security

- ☐ Analog Surveillance
- ☐ IP / HD Surveillance
- ☐ Vehicle Security
- ☐ Transmission (Analog / Digital / Wireless / Fiber-Optic)
- ☐ Video Software/ Management Platform (IVS/ CMS / PSIM)
- ☐ Access Control / Biometrics / RFID
- ☐ Video doorphone / Intercom
- ☐ Alarm
- ☐ Home Automation
- ☐ Intelligent Building
- ☐ Guarding Service
- ☐ Personal Safety
- ☐ Police Equipment

*Key Components

- ☐ Image Sensors
- ☐ Image Processors
- ☐ Image Displays
- ☐ Codec
- ☐ Storage (DOM / SSD / HDD)
- ☐ Platform (CPU / SDRAM / SoC / MCU)
- ☐ Bus Interface IC / USB Controller / RF IC
- ☐ Power Supply

*Fire Safety

- ☐ Active Fire Safety
- ☐ Disaster Prevention and Rescue Equipment
- ☐ Passive Fire Safety
- ☐ Industrial Safety and Environmental Sanitation

*Info Security

- ☐ Security Management
- ☐ Network Security
- ☐ Content Security
- ☐ Application Security

10. How many times have you visited Secutech?

- ☐ First time
- ☐ 2-3 times
- ☐ 4-6 times
- ☐ More than 7 times

SNU3

Privacy Policy Information you supply to Messe Frankfurt New Era Business Media Ltd (MFNE) will be used to provide you with services and information about our exhibition, publications or services in the form of direct marketing activity. Except from above, your data will be strictly managed by MFNE.